

Hospital Grade Devices

Pass & Seymour



Auto-ground clip assures positive ground.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

No exposed terminals create a finger safe application before, during, and after installation.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face.


Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

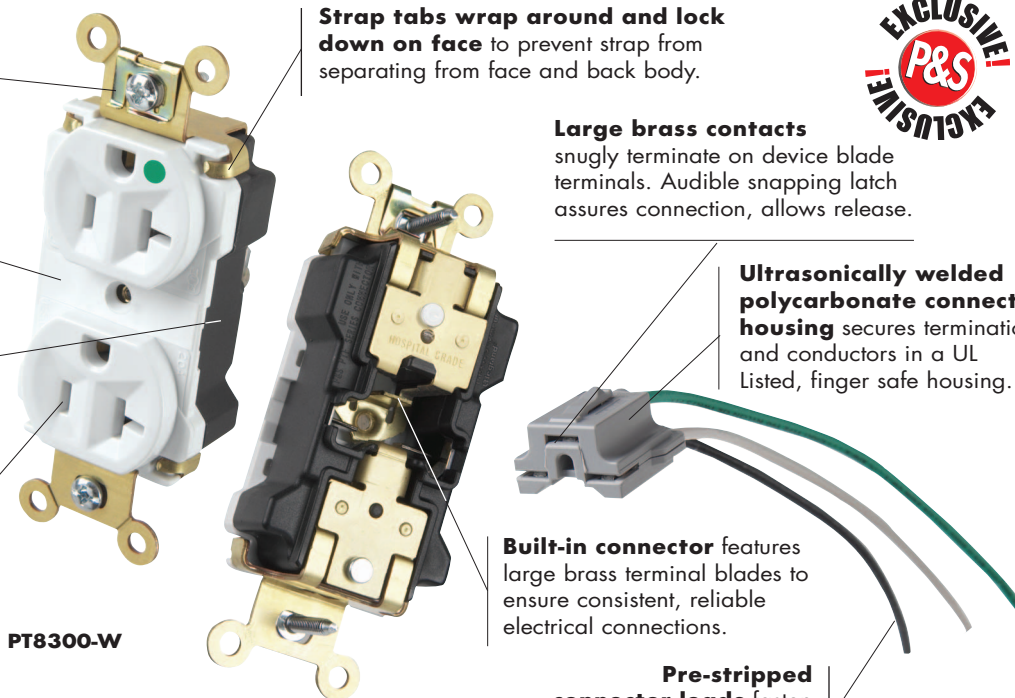

All of our Hospital Grade devices are designed for optimum durability, performance, and reliability — to help make today's facility maintenance operations more productive and consistent.

Index

Device	Rating	Page Number
Receptacle Test Requirements		C-2
PlugTail™ Extra Heavy-Duty & Tamper-Resistant Receptacles	15 & 20A, 125V	C-3
PlugTail™ Decorator Receptacles	15 & 20A, 125V	C-4
Extra Heavy-Duty Duplex Receptacles	15 & 20A, 125V; 20A, 250V	C-5
Extra Heavy-Duty Hospital Grade MRI Receptacles	15 & 20A, 125V	C-6
Heavy-Duty Duplex Receptacles	15 & 20A, 125V; 20A, 250V	C-7
Single Receptacles	15 & 20A, 125V; 20A, 250V	C-8
Heavy-Duty Decorator Receptacles	15 & 20A, 125V	C-9
Tamper-Resistant Duplex Receptacles	15 & 20A, 125V	C-10
GFCI Receptacles	15 & 20A, 125VAC	C-11
Illuminated GFCI Receptacles	15 & 20A, 125VAC	C-12
Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-13
Decorator Combination Nightlight/GFCI Receptacles	15 & 20A, 125VAC	C-14
Extra Heavy-Duty TVSS Duplex Receptacles	15 & 20A, 125VAC	C-15
Straight Blade Plugs & Connectors	15 & 20A, 125 & 250V	C-16
Quad Receptacles	20A, 125V	C-17

2005 National Electrical Code® Sections 517-18(b), 517-19(b)(2) Hospital Grade Receptacles are required in all patient care areas of hospitals, nursing homes, clinics, medical and dental offices.

Hospital Grade Devices Receptacle Test Requirements

All straight blade receptacles must pass a sequence of tests established in UL498. To earn the "Hospital Grade" rating a device must pass an additional series of abuse and performance tests.

Abrupt Plug Removal Test

After ten conditioning insertion and withdrawal cycles of an attachment plug of matching configuration and ground pin, each outlet is to hold without any displacement a fully inserted test pin for at least one minute from a face down horizontal position. Then each receptacle is mounted to represent a typical installation and go through a series of abrupt removal tests – the full insertion of a test plug that is removed by dropping an attached 10-pound weight two feet, thus exerting excessive force on the receptacle face and contacts. Each outlet must go through eight cycles of this test, two in the initial position, then rotated 180 degrees for the next four cycles, then back to the original position for the final two cycles. Duplex receptacles are tested by having one outlet with the ground pin in the 12 o'clock and 6 o'clock positions, the other in the 3 o'clock and 9 o'clock positions. After testing, each outlet, while in the face down horizontal position must hold without displacement a .184" diameter 4-ounce ground pin for one minute. The outlet must have no breakage that would interfere with its function and integrity.

Ground Contact Overstress Test


The receptacle ground contact is conditioned with twenty cycles of full insertion and withdrawal of a .204" oversized test pin. Then, with the receptacle in a horizontal face down position, the same contact must retain a .184" diameter 4-ounce test pin for at least one minute without any displacement.

Impact Test


Receptacles mounted in a cast metal box are placed on a steel plate facing upward. A 5-pound weight is dropped from 18" above the device impacting at the center of the outlet. The device must withstand the impact without having any breakage that hinders its function.

Assembly Security Test


A device, supported at its mounting screws, must withstand 100 pounds through the slots in the receptacle face without cracking the device back body or deforming the yoke.

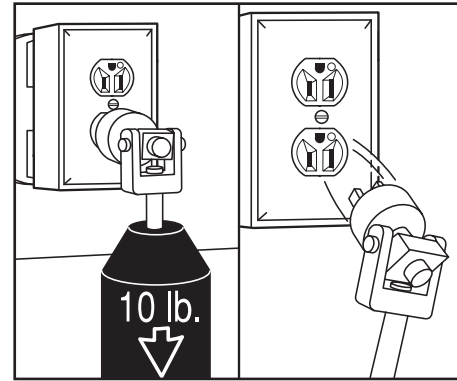


Abrupt Plug Removal Test

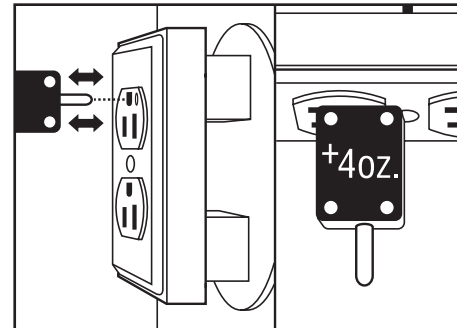

Ground Contact Overstress Test

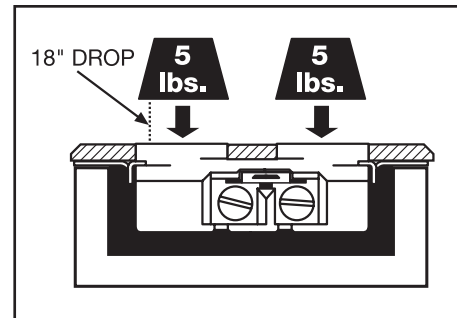

Impact Test

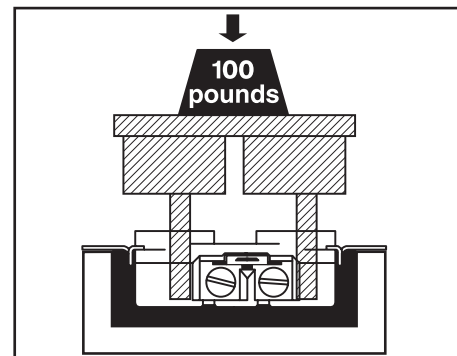


Assembly Security Test


Hospital Grade Devices PlugTail™ Extra Heavy-Duty Receptacles & Tamper-Resistant Receptacles

15 & 20A, 125V


Pass & Seymour

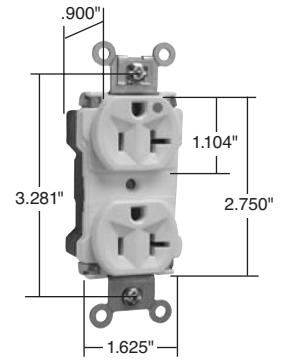

PT8300-W

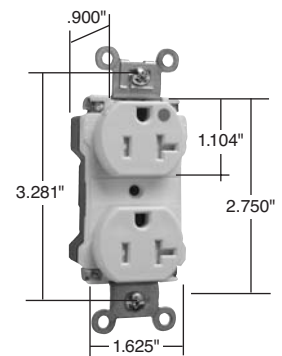

PTTR63H-W

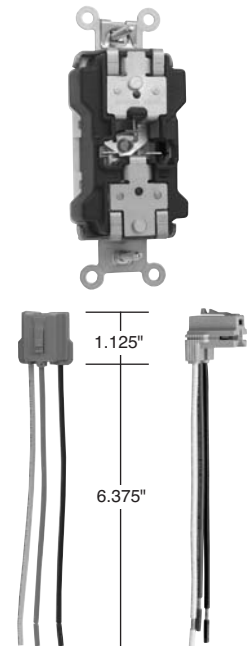


PT6STR PTR6STR

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL498	FSUL WC596
Duplex Receptacles					
PT8200-I	15 125	Ivory	5-15R	•	•
PT8200-W	15 125	White	5-15R	•	•
PT8200	15 125	Brown	5-15R	•	•
PT8200-GRY	15 125	Gray	5-15R	•	•
PT8200-BK	15 125	Black	5-15R	•	•
PT8200-BL	15 125	Blue	5-15R	•	•
PT8200-RED	15 125	Red	5-15R	•	•
PT8200-LA	15 125	Light Almond	5-15R	•	•
PT8300-I	20 125	Ivory	5-20R	•	•
PT8300-W	20 125	White	5-20R	•	•
PT8300	20 125	Brown	5-20R	•	•
PT8300-GRY	20 125	Gray	5-20R	•	•
PT8300-BK	20 125	Black	5-20R	•	•
PT8300-BL	20 125	Blue	5-20R	•	•
PT8300-RED	20 125	Red	5-20R	•	•
PT8300-LA	20 125	Light Almond	5-20R	•	•
Tamper-Resistant Duplex Receptacles					
PTTR62H-I	15 125	Ivory	5-15R	•	•
PTTR62H-W	15 125	White	5-15R	•	•
PTTR62H	15 125	Brown	5-15R	•	•
PTTR62H-GRY	15 125	Gray	5-15R	•	•
PTTR62H-BK	15 125	Black	5-15R	•	•
PTTR62H-BL	15 125	Blue	5-15R	•	•
PTTR62H-RED	15 125	Red	5-15R	•	•
PTTR62H-LA	15 125	Light Almond	5-15R	•	•
PTTR63H-I	20 125	Ivory	5-20R	•	•
PTTR63H-W	20 125	White	5-20R	•	•
PTTR63H	20 125	Brown	5-20R	•	•
PTTR63H-GRY	20 125	Gray	5-20R	•	•
PTTR63H-BK	20 125	Black	5-20R	•	•
PTTR63H-BL	20 125	Blue	5-20R	•	•
PTTR63H-RED	20 125	Red	5-20R	•	•
PTTR63H-LA	20 125	Light Almond	5-20R	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors*		
PT6STR	Stranded	6"
PT6SOL	Solid	6"
PlugTail Connectors – Right Angle*		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"



NEMA 5-15R


NEMA 5-20R




*All PlugTail Connectors are available in various Wire Lengths, please use Configurable Solutions to order.

Configurable Solutions for PlugTail Receptacles and Connectors, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.



PT26362HG-LA

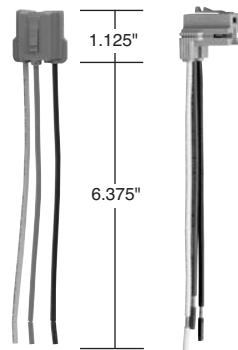

PT6STR

PTRA6STR

Hospital Grade Devices PlugTail™ Decorator Receptacles

15 & 20A, 125V

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Zinc-plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Crimped and welded contacts.



Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance	
				UL [®] UL498	FSUL WC596
Duplex Receptacles					
PT26262HG-I	15 125	Ivory	5-15R	•	•
PT26262HG-W	15 125	White	5-15R	•	•
PT26262HG-GRY	15 125	Gray	5-15R	•	•
PT26262HG-RED	15 125	Red	5-15R	•	•
PT26362HG-I	20 125	Ivory	5-20R	•	•
PT26362HG-W	20 125	White	5-20R	•	•
PT26362HG-GRY	20 125	Gray	5-20R	•	•
PT26362HG-RED	20 125	Red	5-20R	•	•



Catalog Number	Wire Type	Wire Length
PlugTail Connectors*		
PT6STR	Stranded	6"
PT6SOL	Solid	6"
PlugTail Connectors – Right Angle*		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

*All PlugTail Connectors are available in various Wire Lengths, please use Configurable Solutions to order.

Configurable Solutions for PlugTail Receptacles and Connectors, see Page U-1.



NEMA
5-15R



NEMA
5-20R

Hospital Grade Devices Extra Heavy-Duty Duplex Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

Pass & Seymour




Features	
<ul style="list-style-type: none"> One-piece brass mounting strap with integral ground. Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body. Two drive screws anchor strap to back body and face. Exclusive patented feature, circuit label on face allows permanent circuit identification. .036 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention. Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring. Impact-resistant nylon face and back body. 	<ul style="list-style-type: none"> Oversized #10 deep tri-drive head brass terminal and ground screws. Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation. External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection. Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors. Auto-ground clip assures positive ground.

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire						
8200-I	15 125	Ivory	5-15R	•	•	•
8200-W	15 125	White	5-15R	•	•	•
8200	15 125	Brown	5-15R	•	•	•
8200-GRY	15 125	Gray	5-15R	•	•	•
8200-BK	15 125	Black	5-15R	•	•	•
8200-RED	15 125	Red	5-15R	•	•	•
8200-LA	15 125	Light Almond	5-15R	•	•	•
Duplex Receptacles Back & Side Wire						
8300-I	20 125	Ivory	5-20R	•	•	•
8300-W	20 125	White	5-20R	•	•	•
8300	20 125	Brown	5-20R	•	•	•
8300-GRY	20 125	Gray	5-20R	•	•	•
8300-BK	20 125	Black	5-20R	•	•	•
8300-RED	20 125	Red	5-20R	•	•	•
8300-LA	20 125	Light Almond	5-20R	•	•	•
Duplex Receptacles Back & Side Wire						
8800-I	20 250	Ivory	6-20R	•	•	•
8800-W	20 250	White	6-20R	•	•	•
8800	20 250	Brown	6-20R	•	•	•
8800-GRY	20 250	Gray	6-20R	•	•	•
8800-BK	20 250	Black	6-20R	•	•	•
8800-RED	20 250	Red	6-20R	•	•	•
LED Illuminated Face Duplex Receptacles Back & Side Wire						
8200-ILI	15 125	Ivory	5-15R	•	•	•
8200-ILW	15 125	White	5-15R	•	•	•
8200-ILRED	15 125	Red	5-15R	•	•	•
Duplex Receptacles Back & Side Wire						
8300-ILI	20 125	Ivory	5-20R	•	•	•
8300-ILW	20 125	White	5-20R	•	•	•
8300-ILGRY	20 125	Gray	5-20R	•	•	•
8300-ILRED	20 125	Red	5-20R	•	•	•
8300-ILLA	20 125	Light Almond	5-20R	•	•	•

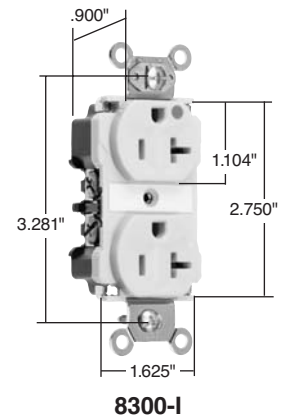

For Configurable Solutions, see Page U-1.



All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour




Hospital Grade Devices Extra Heavy-Duty MRI Receptacles

15 & 20A, 125V

Receptacles designed expressly for MRI applications – We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

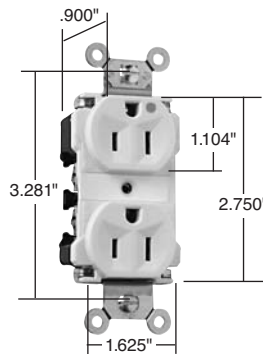

8200-LAMRI

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	CS C22.2 No. 42
Duplex Receptacles Back & Side Wire						
8200-IMRI	15 125	Ivory	5-15R	•	•	•
8200-WMRI	15 125	White	5-15R	•	•	•
8200-MRI	15 125	Brown	5-15R	•	•	•
8200-GRYMRI	15 125	Gray	5-15R	•	•	•
8200-BKMRI	15 125	Black	5-15R	•	•	•
8200-REDMRI	15 125	Red	5-15R	•	•	•
8200-LAMRI	15 125	Light Almond	5-15R	•	•	•
8300-IMRI	20 125	Ivory	5-20R	•	•	•
8300-WMRI	20 125	White	5-20R	•	•	•
8300-MRI	20 125	Brown	5-20R	•	•	•
8300-GRYMRI	20 125	Gray	5-20R	•	•	•
8300-BKMRI	20 125	Black	5-20R	•	•	•
8300-REDMRI	20 125	Red	5-20R	•	•	•
8300-LAMRI	20 125	Light Almond	5-20R	•	•	•

NEMA
5-15RNEMA
5-20R

Hospital Grade Devices Heavy-Duty Duplex Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

Pass & Seymour




Hospital Grade Devices


Heavy-Duty Duplex Receptacles

Features


- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.

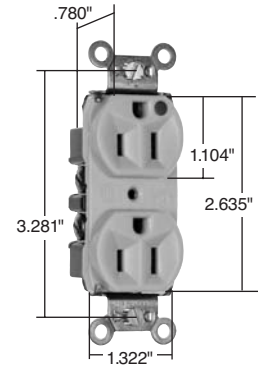

PS8200-HI

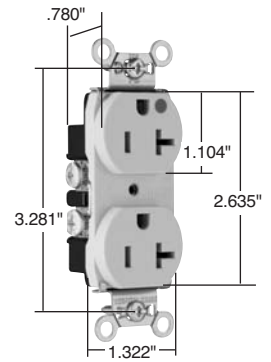

PS8300-HSI

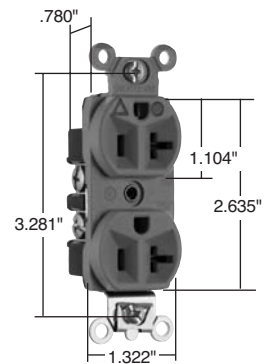

IG8300



NEMA 5-15R



NEMA 5-20R



NEMA 6-20R

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	CSA C22.2 No. 42
Duplex Receptacles Back & Side Wire						
PS8200-HI	15 125	Ivory	5-15R	•	•	•
PS8200-HW	15 125	White	5-15R	•	•	•
PS8200-H	15 125	Brown	5-15R	•	•	•
PS8200-HGRY	15 125	Gray	5-15R	•	•	•
PS8200-HRED	15 125	Red	5-15R	•	•	•
PS8200-HLA	15 125	Light Almond	5-15R	•	•	•
PS8300-HI	20 125	Ivory	5-20R	•	•	•
PS8300-HW	20 125	White	5-20R	•	•	•
PS8300-H	20 125	Brown	5-20R	•	•	•
PS8300-HGRY	20 125	Gray	5-20R	•	•	•
PS8300-HRED	20 125	Red	5-20R	•	•	•
PS8300-HLA	20 125	Light Almond	5-20R	•	•	•
Duplex Receptacles – Smooth Face						
PS8200-HSI	15 125	Ivory	5-15R	•	•	•
PS8200-HSW	15 125	White	5-15R	•	•	•
PS8200-HS	15 125	Brown	5-15R	•	•	•
PS8200-HSGRY	15 125	Gray	5-15R	•	•	•
PS8200-HSRED	15 125	Red	5-15R	•	•	•
PS8200-HSLA	15 125	Light Almond	5-15R	•	•	•
PS8300-HSI	20 125	Ivory	5-20R	•	•	•
PS8300-HSW	20 125	White	5-20R	•	•	•
PS8300-HS	20 125	Brown	5-20R	•	•	•
PS8300-HSGRY	20 125	Gray	5-20R	•	•	•
PS8300-HSRED	20 125	Red	5-20R	•	•	•
PS8300-HSLA	20 125	Light Almond	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire						
IG8200	15 125	Orange	5-15R	•	•	•
IG8200-RED	15 125	Red	5-15R	•	•	•
IG8300	20 125	Orange	5-20R	•	•	•
IG8300-RED	20 125	Red	5-20R	•	•	•
IG8800	20 250	Orange	6-20R	•	•	•
Isolated Ground Single Receptacles Back & Side Wire						
IG8301	20 125	Orange	5-20R	•	•	•



For Configurable Solutions, see Page U-1.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour




Hospital Grade Devices Single Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V



8201-I



8284-I

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL498	FSUL WC596	cUL/CSA
Single Receptacles Back & Side Wire						
8201-I	15 125	Ivory	5-15R	•	•	•
8201-W	15 125	White	5-15R	•	•	•
8201	15 125	Brown	5-15R	•	•	•
8201-GRY	15 125	Gray	5-15R	•	•	•
8201-BK	15 125	Black	5-15R	•	•	•
8201-RED	15 125	Red	5-15R	•	•	•
8301-I	20 125	Ivory	5-20R	•	•	•
8301-W	20 125	White	5-20R	•	•	•
8301	20 125	Brown	5-20R	•	•	•
8301-GRY	20 125	Gray	5-20R	•	•	•
8301-BK	20 125	Black	5-20R	•	•	•
8301-RED	20 125	Red	5-20R	•	•	•
8801-I	20 250	Ivory	6-20R	•	•	•
8801-W	20 250	White	6-20R	•	•	•
8801	20 250	Brown	6-20R	•	•	•
8801-GRY	20 250	Gray	6-20R	•	•	•
8801-BK	20 250	Black	6-20R	•	•	•
8801-RED	20 250	Red	6-20R	•	•	•
Short Strap Single Receptacles 1.937" Screw Spacing, Back & Side Wire						
8284-I	15 125	Ivory	5-15R	•	•	•
8284	15 125	Brown	5-15R	•	•	•
8384-I	20 125	Ivory	5-20R	•	•	•
8384	20 125	Brown	5-20R	•	•	•

For Hospital Use Power Interrupting Device consult Turnlok® Section H.

NEMA
5-15RNEMA
5-20RNEMA
6-20R

Hospital Grade Devices Heavy-Duty Decorator Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

Pass & Seymour




Hospital Grade Devices


Heavy-Duty Decorator Receptacles

Features


- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- Available in Hospital Grade and Specification Grade.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.



26262-HGI

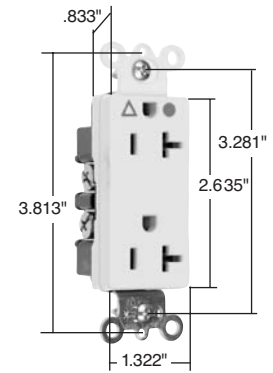

IG26262-HGW

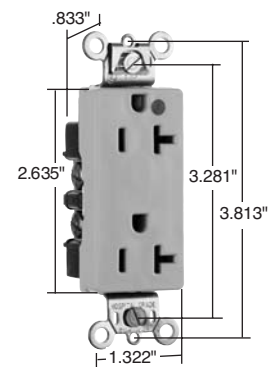


26322-HGI

Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire						
26262-HGI	15 125	Ivory	5-15R	•	•	•
26262-HGW	15 125	White	5-15R	•	•	•
26262-HGGRY	15 125	Gray	5-15R	•	•	•
26262-HGRED	15 125	Red	5-15R	•	•	•
26362-HGI	20 125	Ivory	5-20R	•	•	•
26362-HGW	20 125	White	5-20R	•	•	•
26362-HG	20 125	Brown	5-20R	•	•	•
26362-HGGRY	20 125	Gray	5-20R	•	•	•
26362-HGRED	20 125	Red	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire						
IG26262-HG	15 125	Orange	5-15R	•		•
IG26262-HGRED	15 125	Red	5-15R	•		•
IG26362-HGW	20 125	White	5-20R	•		•
IG26362-HG	20 125	Orange	5-20R	•		•
IG26362-HGRED	20 125	Red	5-20R	•		•
Illuminated Face Duplex Receptacles Back & Side Wire						
26222-HGI	15 125	Ivory	5-15R	•		•
26322-HGI	20 125	Ivory	5-20R	•		•
26322-HGW	20 125	White	5-20R	•		•
26322-HGRED	20 125	Red	5-20R	•		•



NEMA
5-15R



NEMA
5-20R

Catalog Number	Description
Accessories – Decorator Duplex Receptacles	
SS26	Stainless Steel Decorator Wall Plate
SS26-IG*	Stainless Steel Decorator Wall Plate
TP26	Thermoplastic Decorator Wall Plate
TP26-IG*	Thermoplastic Decorator Wall Plate, Orange


*Wall Plates for Isolated Ground System.

Consult Wall Plate Section S for additional openings and colors.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices Tamper-Resistant Duplex Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

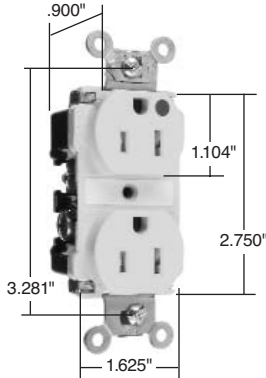

TR62-HI


Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.


Catalog Number	Rating A. V.	Color	NEMA Config. No.	3rd Party Compliance		
				UL UL498	FSUL WC596	SB C22.2 No. 42
Duplex Receptacles Back & Side Wire						
TR62-HI	15 125	Ivory	5-15R	•	•	•
TR62-HW	15 125	White	5-15R	•	•	•
TR62-H	15 125	Brown	5-15R	•	•	•
TR62-HGRY	15 125	Gray	5-15R	•	•	•
TR62-HRED	15 125	Red	5-15R	•	•	•
TR63-HI	20 125	Ivory	5-20R	•	•	•
TR63-HW	20 125	White	5-20R	•	•	•
TR63-H	20 125	Brown	5-20R	•	•	•
TR63-HGRY	20 125	Gray	5-20R	•	•	•
TR63-HRED	20 125	Red	5-20R	•	•	•
TR63-HLA	20 125	Light Almond	5-20R	•	•	•

Consult Straight Blade Devices Section B for non-Hospital Grade Tamper-Resistant Receptacles.


For PlugTail™ Tamper-Resistant Receptacles, see Pages B-3, B-4, and C-3.




The Mechanical Shutter System



Thermoplastic shutter in closed position covers access to contacts.



Insertion of object in any one side does not open shutter.



Two-bladed plug or grounding plug compresses spring and simultaneously opens both shutters.

This tamper-resistant receptacle, like all others, can be defeated by actions such as inserting foreign objects in both sides of the slots simultaneously.

2005 National Electrical Code® Section 517-18(c) Pediatric Locations 15 and 20-ampere, 125-volt receptacles intended to supply patient care areas of pediatric wards, rooms, or areas shall be listed tamper-resistant. For the purpose of this section, a tamper resistant receptacle is a receptacle that, by its construction, limits improper access to its energized contacts.

Hospital Grade Devices GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Features


- Meets 2006 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red lamp).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

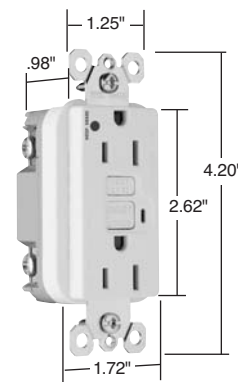

1595-HGW

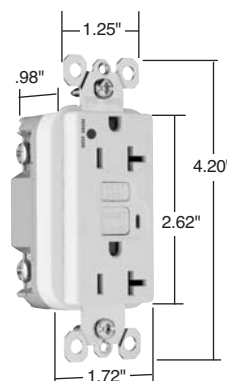


2095-HGW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW 15 Amp Duplex GFCI							
1595-HGI	15	125	Ivory	5-15R	•	•	•
1595-HGW	15	125	White	5-15R	•	•	•
1595-HG	15	125	Brown	5-15R	•	•	•
1595-HGGRY	15	125	Gray	5-15R	•	•	•
1595-HGRED	15	125	Red	5-15R	•	•	•
1595-HGLA	15	125	Light Almond	5-15R	•	•	•
NEW 20 Amp Duplex GFCI							
2095-HGI	20	125	Ivory	5-20R	•	•	•
2095-HGW	20	125	White	5-20R	•	•	•
2095-HG	20	125	Brown	5-20R	•	•	•
2095-HGGRY	20	125	Gray	5-20R	•	•	•
2095-HGRED	20	125	Red	5-20R	•	•	•
2095-HGLA	20	125	Light Almond	5-20R	•	•	•

Available Spring 2006.

For Configurable Solutions, see Page U-1.



NEMA 5-15R


NEMA 5-20R

Pass & Seymour




Hospital Grade Devices Illuminated GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

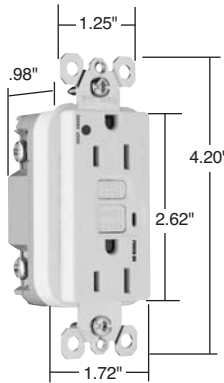

1595-HGWL

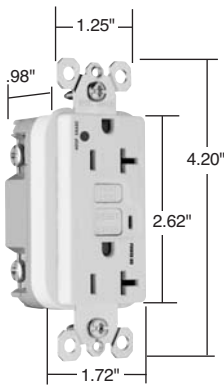

2095-HGWL

NEMA
5-15RNEMA
5-20R

Features

- Green indicator light is ON when power is available. Helps identify emergency power branch circuits.
- Meets 2006 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- Trip Threshold: 5± 1mA
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance		
				UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Illuminated 15 Amp Duplex GFCI						
1595-HGIL	15 125	Ivory	5-15R	•	•	•
1595-HGWL	15 125	White	5-15R	•	•	•
1595-HGL	15 125	Brown	5-15R	•	•	•
1595-HGGRYL	15 125	Gray	5-15R	•	•	•
1595-HGREDL	15 125	Red	5-15R	•	•	•
1595-HGLAL	15 125	Light Almond	5-15R	•	•	•
NEW Illuminated 20 Amp Duplex GFCI						
2095-HGIL	20 125	Ivory	5-20R	•	•	•
2095-HGWL	20 125	White	5-20R	•	•	•
2095-HGL	20 125	Brown	5-20R	•	•	•
2095-HGGRYL	20 125	Gray	5-20R	•	•	•
2095-HGREDL	20 125	Red	5-20R	•	•	•
2095-HGLAL	20 125	Light Almond	5-20R	•	•	•

Available Spring 2006.

For Configurable Solutions, see Page U-1.


Hospital Grade Devices Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



Features	
<ul style="list-style-type: none"> Protects children: patented, UL-Listed shutter system helps prevent improper insertion of foreign objects. Meets 2006 UL requirements. SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. FSUL Listed (Federal Specification WC596). Trip indicator light (red lamp). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. 	<ul style="list-style-type: none"> Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

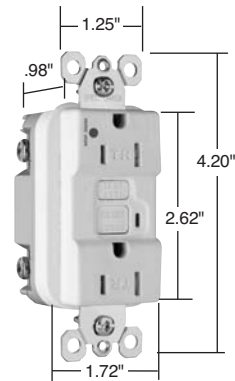

1595-HGTRW

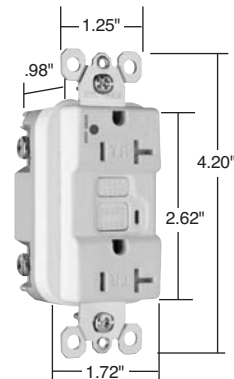

2095-HGTRW



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Tamper-Resistant 15 Amp Duplex GFCI							
1595-HGTRI	15	125	Ivory	5-15R	•	•	•
1595-HGTRW	15	125	White	5-15R	•	•	•
1595-HGTR	15	125	Brown	5-15R	•	•	•
1595-HGTRGRY	15	125	Gray	5-15R	•	•	•
1595-HGTRRED	15	125	Red	5-15R	•	•	•
1595-HGTRLA	15	125	Light Almond	5-15R	•	•	•
Tamper-Resistant 20 Amp Duplex GFCI							
2095-HGTRI	20	125	Ivory	5-20R	•	•	•
2095-HGTRW	20	125	White	5-20R	•	•	•
2095-HGTR	20	125	Brown	5-20R	•	•	•
2095-HGTRGRY	20	125	Gray	5-20R	•	•	•
2095-HGTRRED	20	125	Red	5-20R	•	•	•
2095-HGTRLA	20	125	Light Almond	5-20R	•	•	•


Available Spring 2006.

For Configurable Solutions, see Page U-1.

Pass & Seymour



1595-HGNTLW

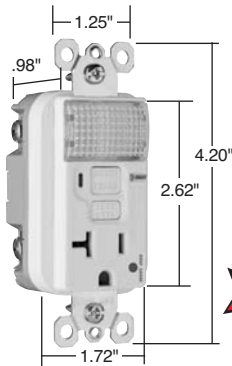

2095-HGNTLW

NEMA
5-15RNEMA
5-20R

Hospital Grade Devices Decorator Combination Nightlight/GFCI Receptacles

15 & 20A, 125VAC

Features

- Meets 2006 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red lamp).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Combination Nightlight/GFCI							
1595-HGNTLI	15 125	0.1618	Ivory	5-15R	•	•	•
1595-HGNTLW	15 125	0.1618	White	5-15R	•	•	•
1595-HGNTL	15 125	0.1618	Brown	5-15R	•	•	•
1595-HGNTLGRY	15 125	0.1618	Gray	5-15R	•	•	•
1595-HGNTLRED	15 125	0.1618	Red	5-15R	•	•	•
1595-HGNTLLA	15 125	0.1618	Light Almond	5-15R	•	•	•
2095-HGNTLI	20 125	0.1233	Ivory	5-20R	•	•	•
2095-HGNTLW	20 125	0.1233	White	5-20R	•	•	•
2095-HGNTL	20 125	0.1233	Brown	5-20R	•	•	•
2095-HGNTLGRY	20 125	0.1233	Gray	5-20R	•	•	•
2095-HGNTLRED	20 125	0.1233	Red	5-20R	•	•	•
2095-HGNTLLA	20 125	0.1233	Light Almond	5-20R	•	•	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-42 for more information.

Available Spring 2006.

Hospital Grade Devices Extra Heavy-Duty TVSS Duplex Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Hospital Grade Devices

Features	
<ul style="list-style-type: none"> UL1449 (latest revision). (1.2 x 50μs 6000V, 8 x 20μs 3000A). 210 joules of energy absorption in each of the three modes. 13,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground. 1 filtering capacitor for 7 to 1 average noise reduction. Nominal let-through (suppressed) voltage in all 3 modes, 500V. Audible Alarm able to be turned on/off. LED indicator light. Response time less than 1 nanosecond for unmounted MOV. Electronic components potted for electrical, mechanical and thermal stability. Overcurrent protection in all 3 modes. 	<ul style="list-style-type: none"> Thermal protection in all 3 modes. Leakage current: 0.5mA at 25°C/120VAC. 3 18mm dual pack MOVs to suppress transients in all modes – equally. Common mode noise attenuation: 500 KHz to 30 MHz; up to 35 dB (50 ohm source impedance) Varistor voltage: 150V RMS. Back and side wire capability including ground terminal. Operating temperature: -40°C to 85°C (-40°F to 185°F) Isolated Ground version complies with NEC 410-56 (C) and 250-146. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.

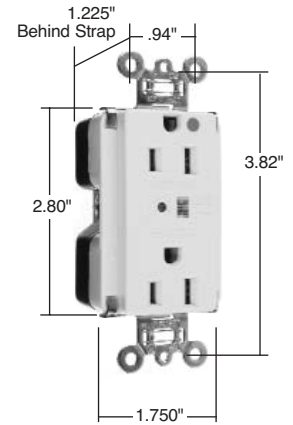

8200-ISP

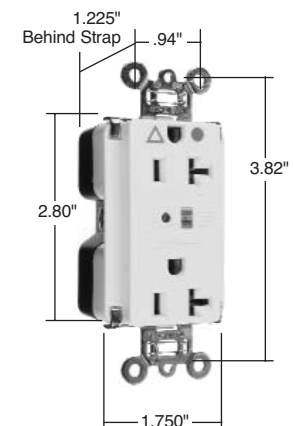

IG8300-ISP

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance			
				UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire							
8200-ISP	15 125	Ivory	5-15R	•	•	•	•
8200-WSP	15 125	White	5-15R	•	•	•	•
8200-SP	15 125	Brown	5-15R	•	•	•	•
8200-GRYSP	15 125	Gray	5-15R	•	•	•	•
8200-REDSP	15 125	Red	5-15R	•	•	•	•
8200-LASP	15 125	Light Almond	5-15R	•	•	•	•
8200-BLSP	15 125	Blue	5-15R	•	•	•	•
8300-ISP	20 125	Ivory	5-20R	•	•	•	•
8300-WSP	20 125	White	5-20R	•	•	•	•
8300-SP	20 125	Brown	5-20R	•	•	•	•
8300-GRYSP	20 125	Gray	5-20R	•	•	•	•
8300-REDSP	20 125	Red	5-20R	•	•	•	•
8300-LASP	20 125	Light Almond	5-20R	•	•	•	•
8300-BLSP	20 125	Blue	5-20R	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire							
IG8200-ISP	15 125	Ivory	5-15R	•	•	•	•
IG8200-WSP	15 125	White	5-15R	•	•	•	•
IG8200-GRYSP	15 125	Gray	5-15R	•	•	•	•
IG8200-LASP	15 125	Light Almond	5-15R	•	•	•	•
IG8200-BLSP	15 125	Blue	5-15R	•	•	•	•
IG8200-OSP	15 125	Orange	5-15R	•	•	•	•
IG8300-ISP	20 125	Ivory	5-20R	•	•	•	•
IG8300-WSP	20 125	White	5-20R	•	•	•	•
IG8300-GRYSP	20 125	Gray	5-20R	•	•	•	•
IG8300-LASP	20 125	Light Almond	5-20R	•	•	•	•
IG8300-BLSP	20 125	Blue	5-20R	•	•	•	•
IG8300-OSP	20 125	Orange	5-20R	•	•	•	•



Extra Heavy-Duty TVSS Duplex Receptacles

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


Pass & Seymour




Hospital Grade Devices Straight Blade Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20
Suitability




PS5266-XHG




PS5269-XHG



PS5266-HGAN



PS8115




PS8119

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596	C22.2 No. 42
Extra-Hard Use (EHU)							
PS5266-XHG	15 125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266-HGAN	15 125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269-XHG	15 125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366-XHG	20 125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366-HGAN	20 125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369-XHG	20 125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666-XHG	15 250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666-HGAN	15 250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669-XHG	15 250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466-XHG	20 250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466-HGAN	20 250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469-XHG	20 250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
MaxGrip® M³							
PS8115	15 125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15 125	Connector, Gray	.230"-.720"	5-15R	•	•	•

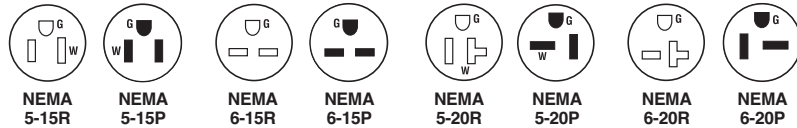

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22-GL	EHU-Strain Relief Grip*
FC30-GL	EHU-Strain Relief Grip*
FC40-GL	EHU-Strain Relief Grip*
FC52-GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® Section K.

Hospital Grade Devices Quad Receptacles

20A, 125V

Pass & Seymour



Application

Pass & Seymour/Legrand's quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

Features

- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL498	UL1449	CSA
Hospital Grade Isolated Ground TVSS Quads							
IG420-HISP	20	125	Ivory	5-20R	•	•	
IG420-HWSP	20	125	White	5-20R	•	•	
IG420-HGRYSP	20	125	Gray	5-20R	•	•	
IG420-HBLSP	20	125	Blue	5-20R	•	•	
Hospital Grade Quads							
420-HI	20	125	Ivory	5-20R	•	•	
420-HW	20	125	White	5-20R	•	•	
420-H	20	125	Brown	5-20R	•	•	
420-HGRY	20	125	Gray	5-20R	•	•	
420-HRED	20	125	Red	5-20R	•	•	

Consult Straight Blade Device Section B for non-Hospital Grade Tamper-Resistant Receptacles, and Quad Adapter Plates.

Hard Use Spec Grade & Hard Use TVSS Spec Grade Quads

- Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4
- Conforms to NEMA WD-1, WD-6.

Electrical

Frequency 60Hz
Voltage 125V

Mechanical

Terminal Identification Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation #14 – #12 AWG copper and copper-clad
Product Identification Ratings are permanent part of device
Weight 10.75 oz.

Environmental

Flammability UL94 V2
Operating Temperature -40°C to 65°C (-40°F to 150°F) continuous without impact

Materials


Face Nylon
Body Nylon
Line Terminals .035" T-type Triple-Wipe Phosphor Bronze
Terminal Screws Brass #8-32
Hex Head Grounding Screw Steel (Green)
Mounting Screws Zinc-plated steel

Additional Specifications for Hard Use TVSS Spec Grade Quads

- ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45
- Installation Categories "A" (ring wave) and "B" (unidirectional impulse)

Electrical

MOV Rating 18mm
UL1449 Suppressed Voltage Rating 500V (L-N, L-G, N-G)
Noise Attenuation -35db Noise Filtering at 5kHz-50MHz
Thermal Protection Fused
Green LED Indicator ON when protection is active, OFF when protection is inactive

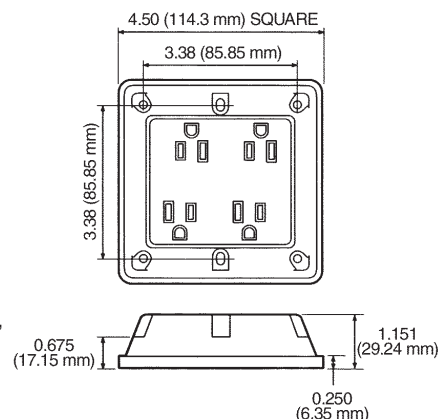

Quad Receptacle



All devices listed on this page conform to NEMA WD-1 and WD-6.