

# Hospital Grade Devices

Pass & Seymour



**Auto-ground clip**  
assures positive ground.

**Exclusive patented feature, circuit label on face** allows permanent circuit identification.

**No exposed terminals** create a finger safe application before, during, and after installation.

**.036 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Two drive screws anchor strap** to back body and face.

PT8300-W


**Strap tabs wrap around and lock down on face** to prevent strap from separating from face and back body.

**Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

**Ultrasonically welded polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger safe housing.

**Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.

**Pre-stripped connector leads** fasten to conductors, easier than standard pigtailed.

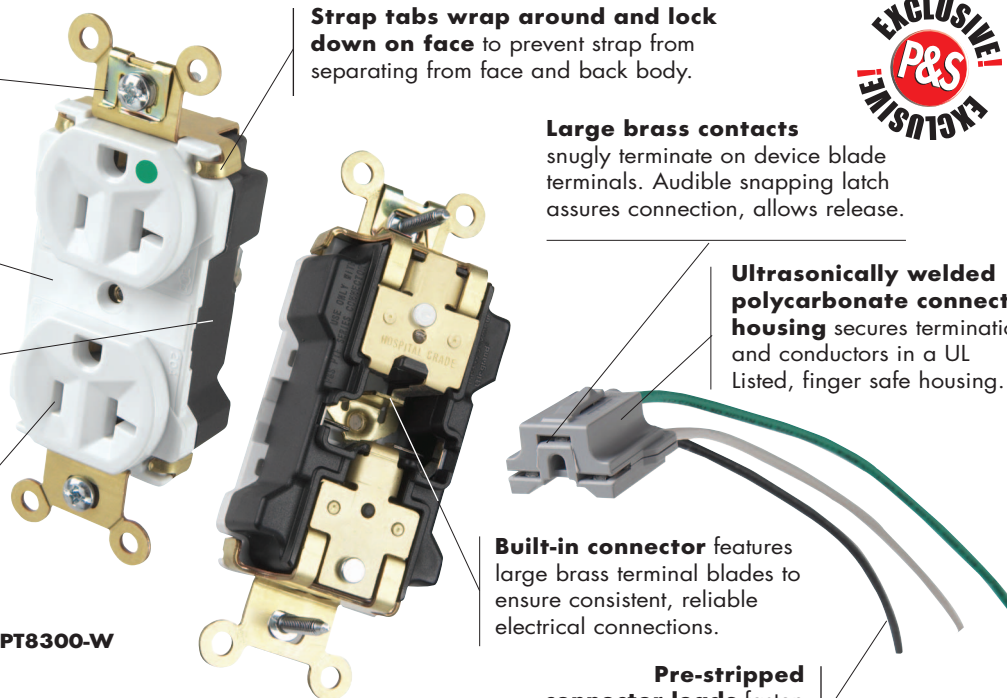

**All of our Hospital Grade devices are designed for optimum durability, performance, and reliability — to help make today's facility maintenance operations more productive and consistent.**

## Index

| Device  | Rating                    | Page Number |
|---|---------------------------|-------------|
| Receptacle Test Requirements                              |                           | C-2         |
| PlugTail™ Extra Heavy-Duty & Tamper-Resistant Receptacles | 15 & 20A, 125V            | C-3         |
| PlugTail™ Decorator Receptacles                           | 15 & 20A, 125V            | C-4         |
| Extra Heavy-Duty Duplex Receptacles                       | 15 & 20A, 125V; 20A, 250V | C-5         |
| Extra Heavy-Duty Hospital Grade MRI Receptacles           | 15 & 20A, 125V            | C-6         |
| Heavy-Duty Duplex Receptacles                             | 15 & 20A, 125V; 20A, 250V | C-7         |
| Single Receptacles  | 15 & 20A, 125V; 20A, 250V | C-8         |
| Heavy-Duty Decorator Receptacles                          | 15 & 20A, 125V            | C-9         |
| Tamper-Resistant Duplex Receptacles                       | 15 & 20A, 125V            | C-10        |
| GFCI Receptacles  | 15 & 20A, 125VAC          | C-11        |
| Illuminated GFCI Receptacles                              | 15 & 20A, 125VAC          | C-12        |
| Tamper-Resistant GFCI Receptacles                         | 15 & 20A, 125VAC          | C-13        |
| Decorator Combination Nightlight/GFCI Receptacles         | 15 & 20A, 125VAC          | C-14        |
| Extra Heavy-Duty TVSS Duplex Receptacles                  | 15 & 20A, 125VAC          | C-15        |
| Straight Blade Plugs & Connectors                         | 15 & 20A, 125 & 250V      | C-16        |
| Quad Receptacles  | 20A, 125V                 | C-17        |

**2005 National Electrical Code® Sections 517-18(b), 517-19(b)(2)** Hospital Grade Receptacles are required in all patient care areas of hospitals, nursing homes, clinics, medical and dental offices.

## Hospital Grade Devices Receptacle Test Requirements

All straight blade receptacles must pass a sequence of tests established in UL498. To earn the "Hospital Grade" rating a device must pass an additional series of abuse and performance tests.

### Abrupt Plug Removal Test

After ten conditioning insertion and withdrawal cycles of an attachment plug of matching configuration and ground pin, each outlet is to hold without any displacement a fully inserted test pin for at least one minute from a face down horizontal position. Then each receptacle is mounted to represent a typical installation and go through a series of abrupt removal tests – the full insertion of a test plug that is removed by dropping an attached 10-pound weight two feet, thus exerting excessive force on the receptacle face and contacts. Each outlet must go through eight cycles of this test, two in the initial position, then rotated 180 degrees for the next four cycles, then back to the original position for the final two cycles. Duplex receptacles are tested by having one outlet with the ground pin in the 12 o'clock and 6 o'clock positions, the other in the 3 o'clock and 9 o'clock positions. After testing, each outlet, while in the face down horizontal position must hold without displacement a .184" diameter 4-ounce ground pin for one minute. The outlet must have no breakage that would interfere with its function and integrity.

### Ground Contact Overstress Test


The receptacle ground contact is conditioned with twenty cycles of full insertion and withdrawal of a .204" oversized test pin. Then, with the receptacle in a horizontal face down position, the same contact must retain a .184" diameter 4-ounce test pin for at least one minute without any displacement.

### Impact Test


Receptacles mounted in a cast metal box are placed on a steel plate facing upward. A 5-pound weight is dropped from 18" above the device impacting at the center of the outlet. The device must withstand the impact without having any breakage that hinders its function.

### Assembly Security Test


A device, supported at its mounting screws, must withstand 100 pounds through the slots in the receptacle face without cracking the device back body or deforming the yoke.

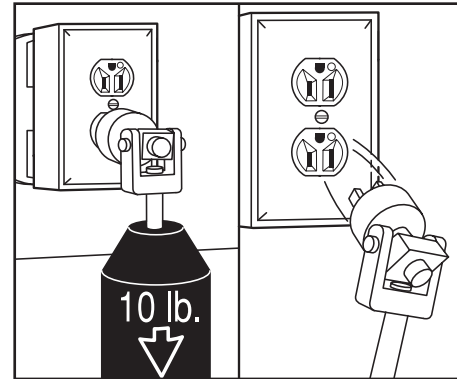


**Abrupt Plug Removal Test**

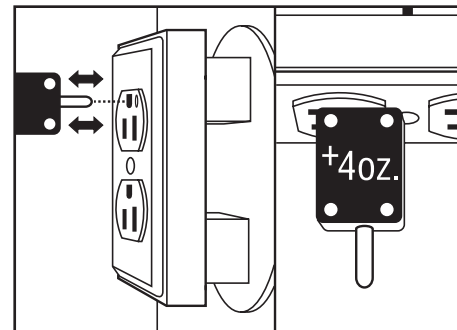

**Ground Contact Overstress Test**

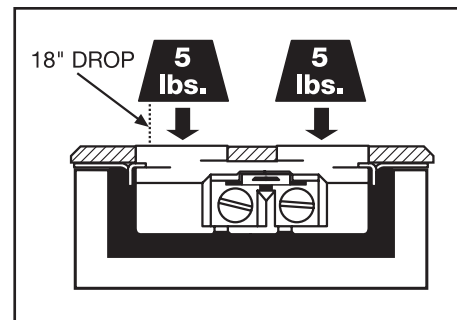

**Impact Test**

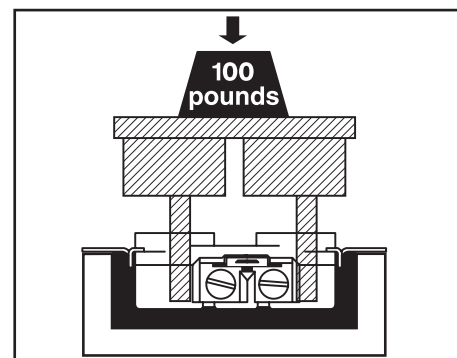


**Assembly Security Test**


# Hospital Grade Devices PlugTail™ Extra Heavy-Duty Receptacles & Tamper-Resistant Receptacles

15 & 20A, 125V


Pass & Seymour

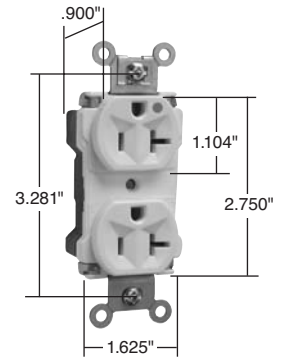

PT8300-W

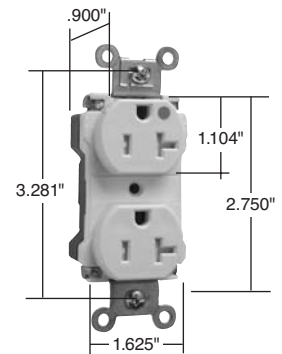

PTTR63H-W

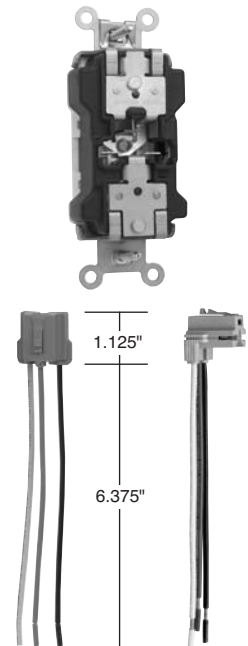


PT6STR PTR6STR

## Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

| Catalog Number                             | Rating<br>A. V. | Color        | NEMA<br>Config. No. | 3rd Party Compliance |               |
|--|-----------------|--------------|---------------------|----------------------|---------------|
|  |                 |              |                     | UL498                | FSUL<br>WC596 |
| <b>Duplex Receptacles</b>                  |                 |              |                     |                      |               |
| PT8200-I                                   | 15 125          | Ivory        | 5-15R               | •                    | •             |
| PT8200-W                                   | 15 125          | White        | 5-15R               | •                    | •             |
| PT8200                                     | 15 125          | Brown        | 5-15R               | •                    | •             |
| PT8200-GRY                                 | 15 125          | Gray         | 5-15R               | •                    | •             |
| PT8200-BK                                  | 15 125          | Black        | 5-15R               | •                    | •             |
| PT8200-BL                                  | 15 125          | Blue         | 5-15R               | •                    | •             |
| PT8200-RED                                 | 15 125          | Red          | 5-15R               | •                    | •             |
| PT8200-LA                                  | 15 125          | Light Almond | 5-15R               | •                    | •             |
| PT8300-I                                   | 20 125          | Ivory        | 5-20R               | •                    | •             |
| PT8300-W                                   | 20 125          | White        | 5-20R               | •                    | •             |
| PT8300                                     | 20 125          | Brown        | 5-20R               | •                    | •             |
| PT8300-GRY                                 | 20 125          | Gray         | 5-20R               | •                    | •             |
| PT8300-BK                                  | 20 125          | Black        | 5-20R               | •                    | •             |
| PT8300-BL                                  | 20 125          | Blue         | 5-20R               | •                    | •             |
| PT8300-RED                                 | 20 125          | Red          | 5-20R               | •                    | •             |
| PT8300-LA                                  | 20 125          | Light Almond | 5-20R               | •                    | •             |
| <b>Tamper-Resistant Duplex Receptacles</b> |                 |              |                     |                      |               |
| PTTR62H-I                                  | 15 125          | Ivory        | 5-15R               | •                    | •             |
| PTTR62H-W                                  | 15 125          | White        | 5-15R               | •                    | •             |
| PTTR62H                                    | 15 125          | Brown        | 5-15R               | •                    | •             |
| PTTR62H-GRY                                | 15 125          | Gray         | 5-15R               | •                    | •             |
| PTTR62H-BK                                 | 15 125          | Black        | 5-15R               | •                    | •             |
| PTTR62H-BL                                 | 15 125          | Blue         | 5-15R               | •                    | •             |
| PTTR62H-RED                                | 15 125          | Red          | 5-15R               | •                    | •             |
| PTTR62H-LA                                 | 15 125          | Light Almond | 5-15R               | •                    | •             |
| PTTR63H-I                                  | 20 125          | Ivory        | 5-20R               | •                    | •             |
| PTTR63H-W                                  | 20 125          | White        | 5-20R               | •                    | •             |
| PTTR63H                                    | 20 125          | Brown        | 5-20R               | •                    | •             |
| PTTR63H-GRY                                | 20 125          | Gray         | 5-20R               | •                    | •             |
| PTTR63H-BK                                 | 20 125          | Black        | 5-20R               | •                    | •             |
| PTTR63H-BL                                 | 20 125          | Blue         | 5-20R               | •                    | •             |
| PTTR63H-RED                                | 20 125          | Red          | 5-20R               | •                    | •             |
| PTTR63H-LA                                 | 20 125          | Light Almond | 5-20R               | •                    | •             |

| Catalog Number                            | Wire Type | Wire Length |
|---|-----------|-------------|
| <b>PlugTail Connectors*</b>               |           |             |
| PT6STR                                    | Stranded  | 6"          |
| PT6SOL                                    | Solid     | 6"          |
| <b>PlugTail Connectors – Right Angle*</b> |           |             |
| PTRA6STR                                  | Stranded  | 6"          |
| PTRA6SOL                                  | Solid     | 6"          |



NEMA  
5-15R




NEMA  
5-20R




\*All PlugTail Connectors are available in various Wire Lengths, please use Configurable Solutions to order.

Configurable Solutions for PlugTail Receptacles and Connectors, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.



PT26362HG-LA

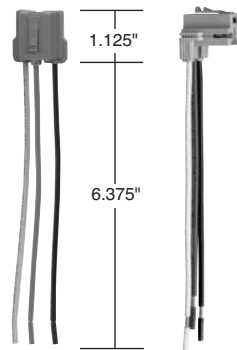

PT6STR

PTRA6STR

# Hospital Grade Devices PlugTail™ Decorator Receptacles

15 & 20A, 125V

### Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Zinc-plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Crimped and welded contacts.

| Catalog Number            | Rating<br>A. V. | Color | NEMA<br>Config. No. | 3rd Party Compliance     |               |
|---------------------------|-----------------|-------|---------------------|--------------------------|---------------|
|                           |                 |       |                     | UL <sup>®</sup><br>UL498 | FSUL<br>WC596 |
| <b>Duplex Receptacles</b> |                 |       |                     |                          |               |
| PT26262HG-I               | 15 125          | Ivory | 5-15R               | •                        | •             |
| PT26262HG-W               | 15 125          | White | 5-15R               | •                        | •             |
| PT26262HG-GRY             | 15 125          | Gray  | 5-15R               | •                        | •             |
| PT26262HG-RED             | 15 125          | Red   | 5-15R               | •                        | •             |
| PT26362HG-I               | 20 125          | Ivory | 5-20R               | •                        | •             |
| PT26362HG-W               | 20 125          | White | 5-20R               | •                        | •             |
| PT26362HG-GRY             | 20 125          | Gray  | 5-20R               | •                        | •             |
| PT26362HG-RED             | 20 125          | Red   | 5-20R               | •                        | •             |



| Catalog Number                            | Wire Type | Wire Length |
|---|-----------|-------------|
| <b>PlugTail Connectors*</b>               |           |             |
| PT6STR                                    | Stranded  | 6"          |
| PT6SOL                                    | Solid     | 6"          |
| <b>PlugTail Connectors – Right Angle*</b> |           |             |
| PTRA6STR                                  | Stranded  | 6"          |
| PTRA6SOL                                  | Solid     | 6"          |



\*All PlugTail Connectors are available in various Wire Lengths, please use Configurable Solutions to order.

*Configurable Solutions for PlugTail Receptacles and Connectors, see Page U-1.*



NEMA  
5-15R



NEMA  
5-20R

# Hospital Grade Devices Extra Heavy-Duty Duplex Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

Pass & Seymour




Hospital Grade Devices


Extra Heavy-Duty Duplex Receptacles

| Features   |  |
|--|--|
| <ul style="list-style-type: none"> <li>One-piece brass mounting strap with integral ground.</li> <li>Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.</li> <li>Two drive screws anchor strap to back body and face.</li> <li>Exclusive patented feature, circuit label on face allows permanent circuit identification.</li> <li>.036 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.</li> <li>Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.</li> <li>Impact-resistant nylon face and back body.</li> </ul> | <ul style="list-style-type: none"> <li>Oversized #10 deep tri-drive head brass terminal and ground screws.</li> <li>Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.</li> <li>External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.</li> <li>Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.</li> <li>Auto-ground clip assures positive ground.</li> </ul> |

| Catalog Number  | Rating<br>A. V. | Color        | NEMA<br>Config. No. | 3rd Party Compliance |               |                    |
|---|-----------------|--------------|---------------------|----------------------|---------------|--------------------|
|   |                 |              |                     | UL<br>UL498          | FSUL<br>WC596 | CS<br>C22.2 No. 42 |
| <b>Duplex Receptacles Back &amp; Side Wire</b>                      |                 |              |                     |                      |               |                    |
| 8200-I  | 15 125          | Ivory        | 5-15R               | •                    | •             | •                  |
| 8200-W  | 15 125          | White        | 5-15R               | •                    | •             | •                  |
| 8200  | 15 125          | Brown        | 5-15R               | •                    | •             | •                  |
| 8200-GRY  | 15 125          | Gray         | 5-15R               | •                    | •             | •                  |
| 8200-BK   | 15 125          | Black        | 5-15R               | •                    | •             | •                  |
| 8200-RED  | 15 125          | Red          | 5-15R               | •                    | •             | •                  |
| 8200-LA   | 15 125          | Light Almond | 5-15R               | •                    | •             | •                  |
| 8300-I  | 20 125          | Ivory        | 5-20R               | •                    | •             | •                  |
| 8300-W  | 20 125          | White        | 5-20R               | •                    | •             | •                  |
| 8300  | 20 125          | Brown        | 5-20R               | •                    | •             | •                  |
| 8300-GRY  | 20 125          | Gray         | 5-20R               | •                    | •             | •                  |
| 8300-BK   | 20 125          | Black        | 5-20R               | •                    | •             | •                  |
| 8300-RED  | 20 125          | Red          | 5-20R               | •                    | •             | •                  |
| 8300-LA   | 20 125          | Light Almond | 5-20R               | •                    | •             | •                  |
| 8800-I  | 20 250          | Ivory        | 6-20R               | •                    | •             | •                  |
| 8800-W  | 20 250          | White        | 6-20R               | •                    | •             | •                  |
| 8800  | 20 250          | Brown        | 6-20R               | •                    | •             | •                  |
| 8800-GRY  | 20 250          | Gray         | 6-20R               | •                    | •             | •                  |
| 8800-BK   | 20 250          | Black        | 6-20R               | •                    | •             | •                  |
| 8800-RED  | 20 250          | Red          | 6-20R               | •                    | •             | •                  |
| <b>LED Illuminated Face Duplex Receptacles Back &amp; Side Wire</b> |                 |              |                     |                      |               |                    |
| 8200-ILI  | 15 125          | Ivory        | 5-15R               | •                    | •             | •                  |
| 8200-ILW  | 15 125          | White        | 5-15R               | •                    | •             | •                  |
| 8200-ILRED  | 15 125          | Red          | 5-15R               | •                    | •             | •                  |
| 8300-ILI  | 20 125          | Ivory        | 5-20R               | •                    | •             | •                  |
| 8300-ILW  | 20 125          | White        | 5-20R               | •                    | •             | •                  |
| 8300-ILGRY  | 20 125          | Gray         | 5-20R               | •                    | •             | •                  |
| 8300-ILRED  | 20 125          | Red          | 5-20R               | •                    | •             | •                  |
| 8300-ILLA   | 20 125          | Light Almond | 5-20R               | •                    | •             | •                  |

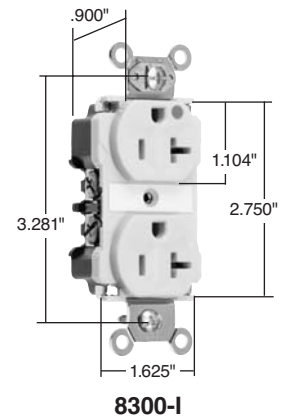

For Configurable Solutions, see Page U-1.



All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass &amp; Seymour




## Hospital Grade Devices Extra Heavy-Duty MRI Receptacles

15 &amp; 20A, 125V

**Receptacles designed expressly for MRI applications** – We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.

### Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

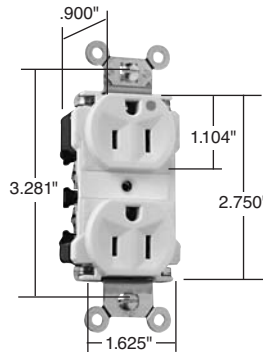

8200-LAMRI

| Catalog Number                                 | Rating<br>A. V. | Color        | NEMA<br>Config. No. | 3rd Party Compliance |               |                    |
|--|-----------------|--------------|---------------------|----------------------|---------------|--------------------|
|  |                 |              |                     | UL498                | FSUL<br>WC596 | CS<br>C22.2 No. 42 |
| <b>Duplex Receptacles Back &amp; Side Wire</b> |                 |              |                     |                      |               |                    |
| 8200-IMRI                                      | 15 125          | Ivory        | 5-15R               | •                    | •             | •                  |
| 8200-WMRI                                      | 15 125          | White        | 5-15R               | •                    | •             | •                  |
| 8200-MRI                                       | 15 125          | Brown        | 5-15R               | •                    | •             | •                  |
| 8200-GRYMRI                                    | 15 125          | Gray         | 5-15R               | •                    | •             | •                  |
| 8200-BKMRI                                     | 15 125          | Black        | 5-15R               | •                    | •             | •                  |
| 8200-REDMRI                                    | 15 125          | Red          | 5-15R               | •                    | •             | •                  |
| 8200-LAMRI                                     | 15 125          | Light Almond | 5-15R               | •                    | •             | •                  |
| 8300-IMRI                                      | 20 125          | Ivory        | 5-20R               | •                    | •             | •                  |
| 8300-WMRI                                      | 20 125          | White        | 5-20R               | •                    | •             | •                  |
| 8300-MRI                                       | 20 125          | Brown        | 5-20R               | •                    | •             | •                  |
| 8300-GRYMRI                                    | 20 125          | Gray         | 5-20R               | •                    | •             | •                  |
| 8300-BKMRI                                     | 20 125          | Black        | 5-20R               | •                    | •             | •                  |
| 8300-REDMRI                                    | 20 125          | Red          | 5-20R               | •                    | •             | •                  |
| 8300-LAMRI                                     | 20 125          | Light Almond | 5-20R               | •                    | •             | •                  |

NEMA  
5-15RNEMA  
5-20R

# Hospital Grade Devices Heavy-Duty Duplex Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

Pass & Seymour




Hospital Grade Devices


Heavy-Duty Duplex Receptacles

## Features


- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.

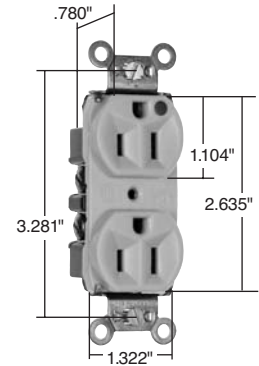

PS8200-HI

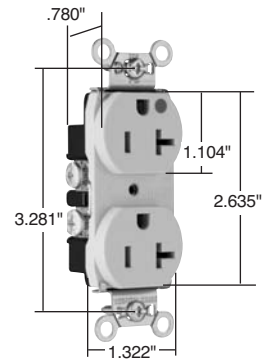

PS8300-HSI

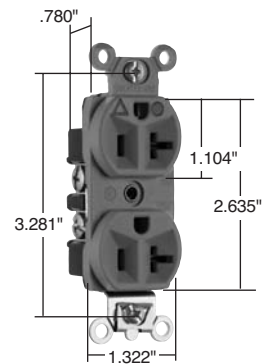

IG8300



NEMA 5-15R



NEMA 5-20R



NEMA 6-20R

| Catalog Number   | Rating<br>A. V. | Color        | NEMA<br>Config. No. | 3rd Party Compliance |               |                     |
|--|-----------------|--------------|---------------------|----------------------|---------------|---------------------|
|  |                 |              |                     | UL498                | FSUL<br>WC596 | CSA<br>C22.2 No. 42 |
| <b>Duplex Receptacles Back &amp; Side Wire</b>                 |                 |              |                     |                      |               |                     |
| PS8200-HI  | 15 125          | Ivory        | 5-15R               | •                    | •             | •                   |
| PS8200-HW  | 15 125          | White        | 5-15R               | •                    | •             | •                   |
| PS8200-H   | 15 125          | Brown        | 5-15R               | •                    | •             | •                   |
| PS8200-HGRY  | 15 125          | Gray         | 5-15R               | •                    | •             | •                   |
| PS8200-HRED  | 15 125          | Red          | 5-15R               | •                    | •             | •                   |
| PS8200-HLA   | 15 125          | Light Almond | 5-15R               | •                    | •             | •                   |
| PS8300-HI  | 20 125          | Ivory        | 5-20R               | •                    | •             | •                   |
| PS8300-HW  | 20 125          | White        | 5-20R               | •                    | •             | •                   |
| PS8300-H   | 20 125          | Brown        | 5-20R               | •                    | •             | •                   |
| PS8300-HGRY  | 20 125          | Gray         | 5-20R               | •                    | •             | •                   |
| PS8300-HRED  | 20 125          | Red          | 5-20R               | •                    | •             | •                   |
| PS8300-HLA   | 20 125          | Light Almond | 5-20R               | •                    | •             | •                   |
| <b>Duplex Receptacles – Smooth Face</b>                        |                 |              |                     |                      |               |                     |
| PS8200-HSI   | 15 125          | Ivory        | 5-15R               | •                    | •             | •                   |
| PS8200-HSW   | 15 125          | White        | 5-15R               | •                    | •             | •                   |
| PS8200-HS  | 15 125          | Brown        | 5-15R               | •                    | •             | •                   |
| PS8200-HSGRY   | 15 125          | Gray         | 5-15R               | •                    | •             | •                   |
| PS8200-HSRED   | 15 125          | Red          | 5-15R               | •                    | •             | •                   |
| PS8200-HSLA  | 15 125          | Light Almond | 5-15R               | •                    | •             | •                   |
| PS8300-HSI   | 20 125          | Ivory        | 5-20R               | •                    | •             | •                   |
| PS8300-HSW   | 20 125          | White        | 5-20R               | •                    | •             | •                   |
| PS8300-HS  | 20 125          | Brown        | 5-20R               | •                    | •             | •                   |
| PS8300-HSGRY   | 20 125          | Gray         | 5-20R               | •                    | •             | •                   |
| PS8300-HSRED   | 20 125          | Red          | 5-20R               | •                    | •             | •                   |
| PS8300-HSLA  | 20 125          | Light Almond | 5-20R               | •                    | •             | •                   |
| <b>Isolated Ground Duplex Receptacles Back &amp; Side Wire</b> |                 |              |                     |                      |               |                     |
| IG8200   | 15 125          | Orange       | 5-15R               | •                    | •             | •                   |
| IG8200-RED   | 15 125          | Red          | 5-15R               | •                    | •             | •                   |
| IG8300   | 20 125          | Orange       | 5-20R               | •                    | •             | •                   |
| IG8300-RED   | 20 125          | Red          | 5-20R               | •                    | •             | •                   |
| IG8800   | 20 250          | Orange       | 6-20R               | •                    | •             | •                   |
| <b>Isolated Ground Single Receptacles Back &amp; Side Wire</b> |                 |              |                     |                      |               |                     |
| IG8301   | 20 125          | Orange       | 5-20R               | •                    | •             | •                   |



For Configurable Solutions, see Page U-1.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass &amp; Seymour




## Hospital Grade Devices Single Receptacles

2 Pole, 3 Wire Grounding 15 &amp; 20A, 125V; 20A, 250V



8201-I



8284-I

| Catalog Number   | Rating<br>A. V. | Color | NEMA<br>Config. No. | 3rd Party Compliance |               |         |
|--|-----------------|-------|---------------------|----------------------|---------------|---------|
|  |                 |       |                     | UL498                | FSUL<br>WC596 | cUL/CSA |
| <b>Single Receptacles Back &amp; Side Wire</b>                                   |                 |       |                     |                      |               |         |
| 8201-I   | 15 125          | Ivory | 5-15R               | •                    | •             | •       |
| 8201-W   | 15 125          | White | 5-15R               | •                    | •             | •       |
| 8201   | 15 125          | Brown | 5-15R               | •                    | •             | •       |
| 8201-GRY   | 15 125          | Gray  | 5-15R               | •                    | •             | •       |
| 8201-BK  | 15 125          | Black | 5-15R               | •                    | •             | •       |
| 8201-RED   | 15 125          | Red   | 5-15R               | •                    | •             | •       |
| 8301-I   | 20 125          | Ivory | 5-20R               | •                    | •             | •       |
| 8301-W   | 20 125          | White | 5-20R               | •                    | •             | •       |
| 8301   | 20 125          | Brown | 5-20R               | •                    | •             | •       |
| 8301-GRY   | 20 125          | Gray  | 5-20R               | •                    | •             | •       |
| 8301-BK  | 20 125          | Black | 5-20R               | •                    | •             | •       |
| 8301-RED   | 20 125          | Red   | 5-20R               | •                    | •             | •       |
| 8801-I   | 20 250          | Ivory | 6-20R               | •                    | •             | •       |
| 8801-W   | 20 250          | White | 6-20R               | •                    | •             | •       |
| 8801   | 20 250          | Brown | 6-20R               | •                    | •             | •       |
| 8801-GRY   | 20 250          | Gray  | 6-20R               | •                    | •             | •       |
| 8801-BK  | 20 250          | Black | 6-20R               | •                    | •             | •       |
| 8801-RED   | 20 250          | Red   | 6-20R               | •                    | •             | •       |
| <b>Short Strap Single Receptacles 1.937" Screw Spacing, Back &amp; Side Wire</b> |                 |       |                     |                      |               |         |
| 8284-I   | 15 125          | Ivory | 5-15R               | •                    | •             | •       |
| 8284   | 15 125          | Brown | 5-15R               | •                    | •             | •       |
| 8384-I   | 20 125          | Ivory | 5-20R               | •                    | •             | •       |
| 8384   | 20 125          | Brown | 5-20R               | •                    | •             | •       |

For Hospital Use Power Interrupting Device consult Turnlok® Section H.

NEMA  
5-15RNEMA  
5-20RNEMA  
6-20R

# Hospital Grade Devices Heavy-Duty Decorator Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

Pass & Seymour




Hospital Grade Devices


Heavy-Duty Decorator Receptacles

## Features


- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- Available in Hospital Grade and Specification Grade.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.



26262-HGI

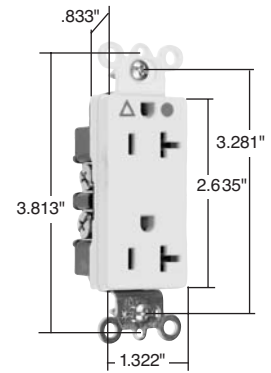


IG26262-HGW

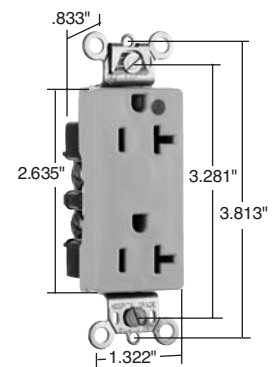

26322-HGI

| Catalog Number  | Rating<br>A. V. | Color  | NEMA<br>Config. No. | 3rd Party Compliance |               |         |
|---|-----------------|--------|---------------------|----------------------|---------------|---------|
|   |                 |        |                     | UL<br>UL498          | FSUL<br>WC596 | cUL/CSA |
| <b>Duplex Receptacles Back &amp; Side Wire</b>                  |                 |        |                     |                      |               |         |
| 26262-HGI   | 15 125          | Ivory  | 5-15R               | •                    | •             | •       |
| 26262-HGW   | 15 125          | White  | 5-15R               | •                    | •             | •       |
| 26262-HGGRY   | 15 125          | Gray   | 5-15R               | •                    | •             | •       |
| 26262-HGRED   | 15 125          | Red    | 5-15R               | •                    | •             | •       |
| 26362-HGI   | 20 125          | Ivory  | 5-20R               | •                    | •             | •       |
| 26362-HGW   | 20 125          | White  | 5-20R               | •                    | •             | •       |
| 26362-HG  | 20 125          | Brown  | 5-20R               | •                    | •             | •       |
| 26362-HGGRY   | 20 125          | Gray   | 5-20R               | •                    | •             | •       |
| 26362-HGRED   | 20 125          | Red    | 5-20R               | •                    | •             | •       |
| <b>Isolated Ground Duplex Receptacles Back &amp; Side Wire</b>  |                 |        |                     |                      |               |         |
| IG26262-HG  | 15 125          | Orange | 5-15R               | •                    |               | •       |
| IG26262-HGRED   | 15 125          | Red    | 5-15R               | •                    |               | •       |
| IG26362-HGW   | 20 125          | White  | 5-20R               | •                    |               | •       |
| IG26362-HG  | 20 125          | Orange | 5-20R               | •                    |               | •       |
| IG26362-HGRED   | 20 125          | Red    | 5-20R               | •                    |               | •       |
| <b>Illuminated Face Duplex Receptacles Back &amp; Side Wire</b> |                 |        |                     |                      |               |         |
| 26222-HGI   | 15 125          | Ivory  | 5-15R               | •                    |               | •       |
| 26322-HGI   | 20 125          | Ivory  | 5-20R               | •                    |               | •       |
| 26322-HGW   | 20 125          | White  | 5-20R               | •                    |               | •       |
| 26322-HGRED   | 20 125          | Red    | 5-20R               | •                    |               | •       |



NEMA  
5-15R



NEMA  
5-20R

| Catalog Number                                    | Description                                |
|---|--|
| <b>Accessories – Decorator Duplex Receptacles</b> |  |
| SS26  | Stainless Steel Decorator Wall Plate       |
| SS26-IG*  | Stainless Steel Decorator Wall Plate       |
| TP26  | Thermoplastic Decorator Wall Plate         |
| TP26-IG*  | Thermoplastic Decorator Wall Plate, Orange |

\*Wall Plates for Isolated Ground System.

Consult Wall Plate Section S for additional openings and colors.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass &amp; Seymour



## Hospital Grade Devices Tamper-Resistant Duplex Receptacles

2 Pole, 3 Wire Grounding 15 &amp; 20A, 125V

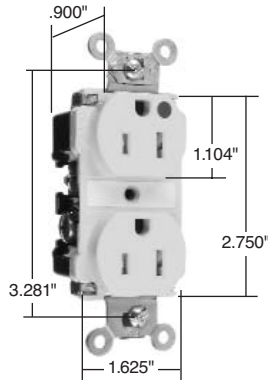

TR62-HI


### Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.


| Catalog Number                                 | Rating<br>A. V. | Color        | NEMA<br>Config. No. | 3rd Party Compliance |               |                    |
|--|-----------------|--------------|---------------------|----------------------|---------------|--------------------|
|  |                 |              |                     | UL<br>UL498          | FSUL<br>WC596 | SB<br>C22.2 No. 42 |
| <b>Duplex Receptacles Back &amp; Side Wire</b> |                 |              |                     |                      |               |                    |
| TR62-HI  | 15 125          | Ivory        | 5-15R               | •                    | •             | •                  |
| TR62-HW  | 15 125          | White        | 5-15R               | •                    | •             | •                  |
| TR62-H   | 15 125          | Brown        | 5-15R               | •                    | •             | •                  |
| TR62-HGRY                                      | 15 125          | Gray         | 5-15R               | •                    | •             | •                  |
| TR62-HRED                                      | 15 125          | Red          | 5-15R               | •                    | •             | •                  |
| TR63-HI  | 20 125          | Ivory        | 5-20R               | •                    | •             | •                  |
| TR63-HW  | 20 125          | White        | 5-20R               | •                    | •             | •                  |
| TR63-H   | 20 125          | Brown        | 5-20R               | •                    | •             | •                  |
| TR63-HGRY                                      | 20 125          | Gray         | 5-20R               | •                    | •             | •                  |
| TR63-HRED                                      | 20 125          | Red          | 5-20R               | •                    | •             | •                  |
| TR63-HLA                                       | 20 125          | Light Almond | 5-20R               | •                    | •             | •                  |

Consult Straight Blade Devices Section B for non-Hospital Grade Tamper-Resistant Receptacles.


For PlugTail™ Tamper-Resistant Receptacles, see Pages B-3, B-4, and C-3.




### The Mechanical Shutter System



Thermoplastic shutter in closed position covers access to contacts.



Insertion of object in any one side does not open shutter.



Two-bladed plug or grounding plug compresses spring and simultaneously opens both shutters.

**This tamper-resistant receptacle, like all others, can be defeated by actions such as inserting foreign objects in both sides of the slots simultaneously.**

**2005 National Electrical Code® Section 517-18(c) Pediatric Locations** 15 and 20-ampere, 125-volt receptacles intended to supply patient care areas of pediatric wards, rooms, or areas shall be listed tamper-resistant. For the purpose of this section, a tamper resistant receptacle is a receptacle that, by its construction, limits improper access to its energized contacts.


# Hospital Grade Devices GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



| Features   |   |
|--|---|
| <ul style="list-style-type: none"> <li>Meets 2006 UL requirements.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>FSUL Listed (Federal Specification WC596).</li> <li>Trip indicator light (red lamp).</li> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> <li>Two back wire holes per terminal.</li> </ul> | <ul style="list-style-type: none"> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul> |
| Specifications   |   |
| <ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>  | <ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>   |

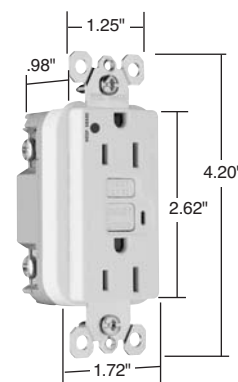

1595-HGW

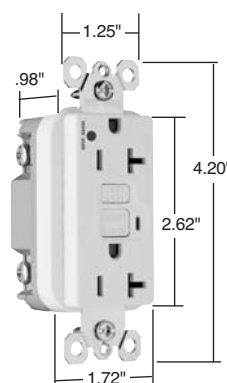


2095-HGW

| Catalog Number                | Rating A. | VAC | Color        | NEMA Config. No. | 3rd Party Compliance   |                       |               |
|-------------------------------|-----------|-----|--------------|------------------|------------------------|-----------------------|---------------|
|                               |           |     |              |                  | UL943<br>C22.2 No. 144 | UL498<br>C22.2 No. 42 | FSUL<br>WC596 |
| <b>NEW 15 Amp Duplex GFCI</b> |           |     |              |                  |                        |                       |               |
| 1595-HGI                      | 15        | 125 | Ivory        | 5-15R            | •                      | •                     | •             |
| 1595-HGW                      | 15        | 125 | White        | 5-15R            | •                      | •                     | •             |
| 1595-HG                       | 15        | 125 | Brown        | 5-15R            | •                      | •                     | •             |
| 1595-HGGRY                    | 15        | 125 | Gray         | 5-15R            | •                      | •                     | •             |
| 1595-HGRED                    | 15        | 125 | Red          | 5-15R            | •                      | •                     | •             |
| 1595-HGLA                     | 15        | 125 | Light Almond | 5-15R            | •                      | •                     | •             |
| <b>NEW 20 Amp Duplex GFCI</b> |           |     |              |                  |                        |                       |               |
| 2095-HGI                      | 20        | 125 | Ivory        | 5-20R            | •                      | •                     | •             |
| 2095-HGW                      | 20        | 125 | White        | 5-20R            | •                      | •                     | •             |
| 2095-HG                       | 20        | 125 | Brown        | 5-20R            | •                      | •                     | •             |
| 2095-HGGRY                    | 20        | 125 | Gray         | 5-20R            | •                      | •                     | •             |
| 2095-HGRED                    | 20        | 125 | Red          | 5-20R            | •                      | •                     | •             |
| 2095-HGLA                     | 20        | 125 | Light Almond | 5-20R            | •                      | •                     | •             |

Available Spring 2006.

For Configurable Solutions, see Page U-1.



NEMA 5-15R


NEMA 5-20R

Pass &amp; Seymour




## Hospital Grade Devices Illuminated GFCI Receptacles

2 Pole, 3 Wire Grounding 15 &amp; 20A, 125VAC

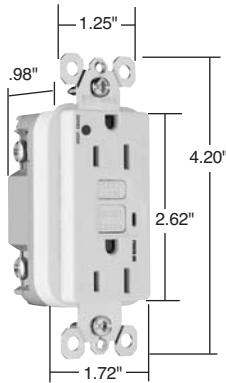

1595-HGWL

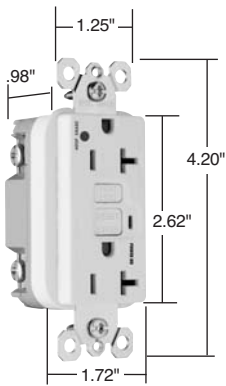

2095-HGWL

NEMA  
5-15RNEMA  
5-20R

### Features

- Green indicator light is ON when power is available. Helps identify emergency power branch circuits.
- Meets 2006 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Time: 0.025 sec., nominal per UL Standard
- Trip Threshold: 5± 1mA
- 20 Amp feed-thru capacity

| Catalog Number                            | Rating<br>A. VAC | Color        | NEMA<br>Config. No. | 3rd Party Compliance   |                       |               |
|---|------------------|--------------|---------------------|------------------------|-----------------------|---------------|
|   |                  |              |                     | UL943<br>C22.2 No. 144 | UL498<br>C22.2 No. 42 | FSUL<br>WC596 |
| <b>NEW</b> Illuminated 15 Amp Duplex GFCI |                  |              |                     |                        |                       |               |
| 1595-HGIL                                 | 15 125           | Ivory        | 5-15R               | •                      | •                     | •             |
| 1595-HGWL                                 | 15 125           | White        | 5-15R               | •                      | •                     | •             |
| 1595-HGL                                  | 15 125           | Brown        | 5-15R               | •                      | •                     | •             |
| 1595-HGGRYL                               | 15 125           | Gray         | 5-15R               | •                      | •                     | •             |
| 1595-HGREDL                               | 15 125           | Red          | 5-15R               | •                      | •                     | •             |
| 1595-HGLAL                                | 15 125           | Light Almond | 5-15R               | •                      | •                     | •             |
| <b>NEW</b> Illuminated 20 Amp Duplex GFCI |                  |              |                     |                        |                       |               |
| 2095-HGIL                                 | 20 125           | Ivory        | 5-20R               | •                      | •                     | •             |
| 2095-HGWL                                 | 20 125           | White        | 5-20R               | •                      | •                     | •             |
| 2095-HGL                                  | 20 125           | Brown        | 5-20R               | •                      | •                     | •             |
| 2095-HGGRYL                               | 20 125           | Gray         | 5-20R               | •                      | •                     | •             |
| 2095-HGREDL                               | 20 125           | Red          | 5-20R               | •                      | •                     | •             |
| 2095-HGLAL                                | 20 125           | Light Almond | 5-20R               | •                      | •                     | •             |

Available Spring 2006.

For Configurable Solutions, see Page U-1.


# Hospital Grade Devices Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Pass & Seymour



| Features  |  |
|---|--|
| <ul style="list-style-type: none"> <li>Protects children: patented, UL-Listed shutter system helps prevent improper insertion of foreign objects.</li> <li>Meets 2006 UL requirements.</li> <li>SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.</li> <li>Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.</li> <li>Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.</li> <li>FSUL Listed (Federal Specification WC596).</li> <li>Trip indicator light (red lamp).</li> <li>Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.</li> </ul> | <ul style="list-style-type: none"> <li>Two back wire holes per terminal.</li> <li>Ground screw has a back wire clamp for easy installation.</li> <li>1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.</li> <li>Mounting screws are shipped captive in the device and wall plate for easier installation.</li> <li>High-impact-resistant thermoplastic construction.</li> <li>Extra-long strap.</li> <li>Button colors match the device face.</li> <li>Dual-direction test and reset buttons.</li> <li>Class A rated GFCI.</li> <li>Supplied with matching TP26 nylon wall plate.</li> <li>Tri-drive screws.</li> </ul> |
| Specifications  |  |
| <ul style="list-style-type: none"> <li>Supply Voltage: 125VAC, 60 Hz</li> <li>Supply Voltage Range: 102-132 VAC</li> <li>Trip Threshold: 5± 1mA</li> </ul>  | <ul style="list-style-type: none"> <li>Trip Time: 0.025 sec., nominal per UL Standard</li> <li>20 Amp feed-thru capacity</li> </ul>  |

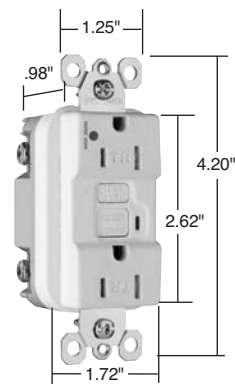

1595-HGTRW

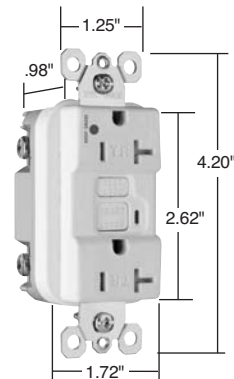

2095-HGTRW



NEMA 5-15R



NEMA 5-20R

| Catalog Number                             | Rating A. | VAC | Color        | NEMA Config. No. | 3rd Party Compliance   |                       |               |
|--|-----------|-----|--------------|------------------|------------------------|-----------------------|---------------|
|  |           |     |              |                  | UL943<br>C22.2 No. 144 | UL498<br>C22.2 No. 42 | FSUL<br>WC596 |
| <b>Tamper-Resistant 15 Amp Duplex GFCI</b> |           |     |              |                  |                        |                       |               |
| 1595-HGTRI                                 | 15        | 125 | Ivory        | 5-15R            | •                      | •                     | •             |
| 1595-HGTRW                                 | 15        | 125 | White        | 5-15R            | •                      | •                     | •             |
| 1595-HGTR                                  | 15        | 125 | Brown        | 5-15R            | •                      | •                     | •             |
| 1595-HGTRGRY                               | 15        | 125 | Gray         | 5-15R            | •                      | •                     | •             |
| 1595-HGTRRED                               | 15        | 125 | Red          | 5-15R            | •                      | •                     | •             |
| 1595-HGTRLA                                | 15        | 125 | Light Almond | 5-15R            | •                      | •                     | •             |
| <b>Tamper-Resistant 20 Amp Duplex GFCI</b> |           |     |              |                  |                        |                       |               |
| 2095-HGTRI                                 | 20        | 125 | Ivory        | 5-20R            | •                      | •                     | •             |
| 2095-HGTRW                                 | 20        | 125 | White        | 5-20R            | •                      | •                     | •             |
| 2095-HGTR                                  | 20        | 125 | Brown        | 5-20R            | •                      | •                     | •             |
| 2095-HGTRGRY                               | 20        | 125 | Gray         | 5-20R            | •                      | •                     | •             |
| 2095-HGTRRED                               | 20        | 125 | Red          | 5-20R            | •                      | •                     | •             |
| 2095-HGTRLA                                | 20        | 125 | Light Almond | 5-20R            | •                      | •                     | •             |

Available Spring 2006.


For Configurable Solutions, see Page U-1.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass &amp; Seymour



1595-HGNTLW

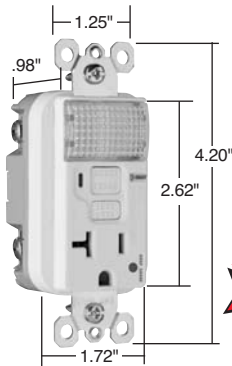

2095-HGNTLW

NEMA  
5-15RNEMA  
5-20R

## Hospital Grade Devices Decorator Combination Nightlight/GFCI Receptacles

15 &amp; 20A, 125VAC

### Features

- Meets 2006 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red lamp).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

| Catalog Number                                | Rating<br>A. VAC | Light<br>Output in<br>1' FCD* | Color        | NEMA<br>Config.<br>No. | 3rd Party Compliance   |                       |               |
|---|------------------|-------------------------------|--------------|------------------------|------------------------|-----------------------|---------------|
|   |                  |                               |              |                        | UL943<br>C22.2 No. 144 | UL498<br>C22.2 No. 42 | FSUL<br>WC596 |
| <b>NEW</b> <b>Combination Nightlight/GFCI</b> |                  |                               |              |                        |                        |                       |               |
| 1595-HGNTLI                                   | 15 125           | 0.1618                        | Ivory        | 5-15R                  | •                      | •                     | •             |
| 1595-HGNTLW                                   | 15 125           | 0.1618                        | White        | 5-15R                  | •                      | •                     | •             |
| 1595-HGNTL                                    | 15 125           | 0.1618                        | Brown        | 5-15R                  | •                      | •                     | •             |
| 1595-HGNTLGRY                                 | 15 125           | 0.1618                        | Gray         | 5-15R                  | •                      | •                     | •             |
| 1595-HGNTLRED                                 | 15 125           | 0.1618                        | Red          | 5-15R                  | •                      | •                     | •             |
| 1595-HGNTLLA                                  | 15 125           | 0.1618                        | Light Almond | 5-15R                  | •                      | •                     | •             |
| 2095-HGNTLI                                   | 20 125           | 0.1233                        | Ivory        | 5-20R                  | •                      | •                     | •             |
| 2095-HGNTLW                                   | 20 125           | 0.1233                        | White        | 5-20R                  | •                      | •                     | •             |
| 2095-HGNTL                                    | 20 125           | 0.1233                        | Brown        | 5-20R                  | •                      | •                     | •             |
| 2095-HGNTLGRY                                 | 20 125           | 0.1233                        | Gray         | 5-20R                  | •                      | •                     | •             |
| 2095-HGNTLRED                                 | 20 125           | 0.1233                        | Red          | 5-20R                  | •                      | •                     | •             |
| 2095-HGNTLLA                                  | 20 125           | 0.1233                        | Light Almond | 5-20R                  | •                      | •                     | •             |

\*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page U-42 for more information.

Available Spring 2006.

# Hospital Grade Devices Extra Heavy-Duty TVSS Duplex Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




Hospital Grade Devices

| Features   |   |
|--|---|
| <ul style="list-style-type: none"> <li>UL1449 (latest revision). (1.2 x 50μs 6000V, 8 x 20μs 3000A).</li> <li>210 joules of energy absorption in each of the three modes.</li> <li>13,000 amps current handling capability in each of three modes: line to neutral, line to ground, neutral to ground.</li> <li>1 filtering capacitor for 7 to 1 average noise reduction.</li> <li>Nominal let-through (suppressed) voltage in all 3 modes, 500V.</li> <li>Audible Alarm able to be turned on/off.</li> <li>LED indicator light.</li> <li>Response time less than 1 nanosecond for unmounted MOV.</li> <li>Electronic components potted for electrical, mechanical and thermal stability.</li> <li>Overcurrent protection in all 3 modes.</li> </ul> | <ul style="list-style-type: none"> <li>Thermal protection in all 3 modes.</li> <li>Leakage current: 0.5mA at 25°C/120VAC.</li> <li>3 18mm dual pack MOVs to suppress transients in all modes – equally.</li> <li>Common mode noise attenuation: 500 KHz to 30 MHz; up to 35 dB (50 ohm source impedance)</li> <li>Varistor voltage: 150V RMS.</li> <li>Back and side wire capability including ground terminal.</li> <li>Operating temperature: -40°C to 85°C (-40°F to 185°F)</li> <li>Isolated Ground version complies with NEC 410-56 (C) and 250-146.</li> <li>Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.</li> </ul> |

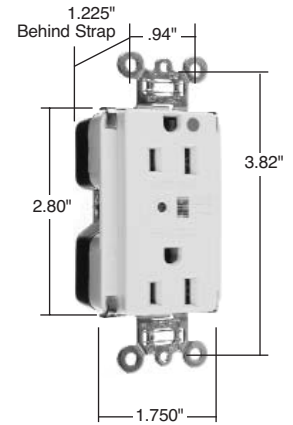


8200-ISP

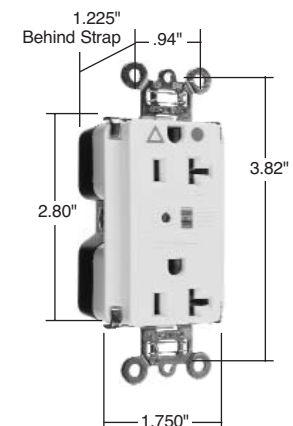

IG8300-ISP

| Catalog Number   | Rating<br>A. VAC | Color        | NEMA<br>Config. No. | 3rd Party Compliance |       |               |         |
|--|------------------|--------------|---------------------|----------------------|-------|---------------|---------|
|  |                  |              |                     | UL1449               | UL498 | FSUL<br>WC596 | cUL/CSA |
| <b>Duplex Receptacles Back &amp; Side Wire</b>                 |                  |              |                     |                      |       |               |         |
| 8200-ISP   | 15 125           | Ivory        | 5-15R               | •                    | •     | •             | •       |
| 8200-WSP   | 15 125           | White        | 5-15R               | •                    | •     | •             | •       |
| 8200-SP  | 15 125           | Brown        | 5-15R               | •                    | •     | •             | •       |
| 8200-GRYSP   | 15 125           | Gray         | 5-15R               | •                    | •     | •             | •       |
| 8200-REDSP   | 15 125           | Red          | 5-15R               | •                    | •     | •             | •       |
| 8200-LASP  | 15 125           | Light Almond | 5-15R               | •                    | •     | •             | •       |
| 8200-BLSP  | 15 125           | Blue         | 5-15R               | •                    | •     | •             | •       |
| 8300-ISP   | 20 125           | Ivory        | 5-20R               | •                    | •     | •             | •       |
| 8300-WSP   | 20 125           | White        | 5-20R               | •                    | •     | •             | •       |
| 8300-SP  | 20 125           | Brown        | 5-20R               | •                    | •     | •             | •       |
| 8300-GRYSP   | 20 125           | Gray         | 5-20R               | •                    | •     | •             | •       |
| 8300-REDSP   | 20 125           | Red          | 5-20R               | •                    | •     | •             | •       |
| 8300-LASP  | 20 125           | Light Almond | 5-20R               | •                    | •     | •             | •       |
| 8300-BLSP  | 20 125           | Blue         | 5-20R               | •                    | •     | •             | •       |
| <b>Isolated Ground Duplex Receptacles Back &amp; Side Wire</b> |                  |              |                     |                      |       |               |         |
| IG8200-ISP   | 15 125           | Ivory        | 5-15R               | •                    | •     | •             | •       |
| IG8200-WSP   | 15 125           | White        | 5-15R               | •                    | •     | •             | •       |
| IG8200-GRYSP   | 15 125           | Gray         | 5-15R               | •                    | •     | •             | •       |
| IG8200-LASP  | 15 125           | Light Almond | 5-15R               | •                    | •     | •             | •       |
| IG8200-BLSP  | 15 125           | Blue         | 5-15R               | •                    | •     | •             | •       |
| IG8200-OSP   | 15 125           | Orange       | 5-15R               | •                    | •     | •             | •       |
| IG8300-ISP   | 20 125           | Ivory        | 5-20R               | •                    | •     | •             | •       |
| IG8300-WSP   | 20 125           | White        | 5-20R               | •                    | •     | •             | •       |
| IG8300-GRYSP   | 20 125           | Gray         | 5-20R               | •                    | •     | •             | •       |
| IG8300-LASP  | 20 125           | Light Almond | 5-20R               | •                    | •     | •             | •       |
| IG8300-BLSP  | 20 125           | Blue         | 5-20R               | •                    | •     | •             | •       |
| IG8300-OSP   | 20 125           | Orange       | 5-20R               | •                    | •     | •             | •       |



All devices listed on this page conform to NEMA WD-1 and WD-6.  
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


Extra Heavy-Duty TVSS Duplex Receptacles




# Hospital Grade Devices Straight Blade Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

**IP20**  
Suitability




**PS5266-XHG**




**PS5269-XHG**



**PS5266-HGAN**



**PS8115**




**PS8119**

**Features – Extra-Hard Use (EHU)**

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

| Catalog Number                | Rating A. V. | Description               | Cord Diameter | NEMA Config. No. | 3rd Party Compliance |            |              |
|-------------------------------|--------------|---------------------------|---------------|------------------|----------------------|------------|--------------|
|                               |              |                           |               |                  | UL498                | FSUL WC596 | C22.2 No. 42 |
| <b>Extra-Hard Use (EHU)</b>   |              |                           |               |                  |                      |            |              |
| PS5266-XHG                    | 15 125       | Plug, Black & Clear       | .230"-.720"   | 5-15P            | •                    | •          | •            |
| PS5266-HGAN                   | 15 125       | Angle Plug, Black & Clear | .320"-.655"   | 5-15P            | •                    | •          | •            |
| PS5269-XHG                    | 15 125       | Connector, Black & Clear  | .230"-.720"   | 5-15R            | •                    | •          | •            |
| PS5366-XHG                    | 20 125       | Plug, Black & Clear       | .230"-.720"   | 5-20P            | •                    | •          | •            |
| PS5366-HGAN                   | 20 125       | Angle Plug, Black & Clear | .320"-.655"   | 5-20P            | •                    | •          | •            |
| PS5369-XHG                    | 20 125       | Connector, Black & Clear  | .230"-.720"   | 5-20R            | •                    | •          | •            |
| PS5666-XHG                    | 15 250       | Plug, Black & Clear       | .230"-.720"   | 6-15P            | •                    | •          | •            |
| PS5666-HGAN                   | 15 250       | Angle Plug, Black & Clear | .320"-.655"   | 6-15P            | •                    | •          | •            |
| PS5669-XHG                    | 15 250       | Connector, Black & Clear  | .230"-.720"   | 6-15R            | •                    | •          | •            |
| PS5466-XHG                    | 20 250       | Plug, Black & Clear       | .230"-.720"   | 6-20P            | •                    | •          | •            |
| PS5466-HGAN                   | 20 250       | Angle Plug, Black & Clear | .320"-.655"   | 6-20P            | •                    | •          | •            |
| PS5469-XHG                    | 20 250       | Connector, Black & Clear  | .230"-.720"   | 6-20R            | •                    | •          | •            |
| <b>MaxGrip® M<sup>3</sup></b> |              |                           |               |                  |                      |            |              |
| PS8115                        | 15 125       | Plug, Gray                | .230"-.720"   | 5-15P            | •                    | •          | •            |
| PS8119                        | 15 125       | Connector, Gray           | .230"-.720"   | 5-15R            | •                    | •          | •            |

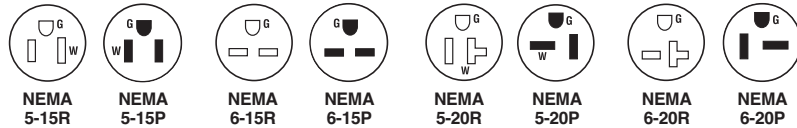

| Catalog Number     | Description                                      |
|--------------------|--|
| <b>Accessories</b> |  |
| EHU15AN            | 15 & 20A EHU Straight Blade, Right Angle Adapter |
| FC22-GL            | EHU-Strain Relief Grip*                          |
| FC30-GL            | EHU-Strain Relief Grip*                          |
| FC40-GL            | EHU-Strain Relief Grip*                          |
| FC52-GL            | EHU-Strain Relief Grip*                          |

\*For further information consult the Flexcor® Section K.

# Hospital Grade Devices Quad Receptacles

20A, 125V

Pass & Seymour



## Application

Pass & Seymour/Legrand's quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

## Features

- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

| Catalog Number                                   | Rating |     | Color | NEMA Config. No. | 3rd Party Compliance |        |     |
|--|--------|-----|-------|------------------|----------------------|--------|-----|
|  | A.     | V.  |       |                  | UL498                | UL1449 | CSA |
| <b>Hospital Grade Isolated Ground TVSS Quads</b> |        |     |       |                  |                      |        |     |
| IG420-HISP                                       | 20     | 125 | Ivory | 5-20R            | •                    | •      |     |
| IG420-HWSP                                       | 20     | 125 | White | 5-20R            | •                    | •      |     |
| IG420-HGRYSP                                     | 20     | 125 | Gray  | 5-20R            | •                    | •      |     |
| IG420-HBLSP                                      | 20     | 125 | Blue  | 5-20R            | •                    | •      |     |
| <b>Hospital Grade Quads</b>                      |        |     |       |                  |                      |        |     |
| 420-HI   | 20     | 125 | Ivory | 5-20R            | •                    | •      |     |
| 420-HW   | 20     | 125 | White | 5-20R            | •                    | •      |     |
| 420-H  | 20     | 125 | Brown | 5-20R            | •                    | •      |     |
| 420-HGRY   | 20     | 125 | Gray  | 5-20R            | •                    | •      |     |
| 420-HRED   | 20     | 125 | Red   | 5-20R            | •                    | •      |     |

Consult Straight Blade Device Section B for non-Hospital Grade Tamper-Resistant Receptacles, and Quad Adapter Plates.

## Hard Use Spec Grade & Hard Use TVSS Spec Grade Quads

- Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4
- Conforms to NEMA WD-1, WD-6.

### Electrical

Frequency 60Hz  
Voltage 125V

### Mechanical

Terminal Identification Brass = Hot, Nickel = Neutral, Green = Ground  
Terminal Accommodation #14 – #12 AWG copper and copper-clad  
Product Identification Ratings are permanent part of device  
Weight 10.75 oz.

### Environmental

Flammability UL94 V2  
Operating Temperature -40°C to 65°C (-40°F to 150°F) continuous without impact

### Materials


Face Nylon  
Body Nylon  
Line Terminals .035" T-type Triple-Wipe Phosphor Bronze  
Terminal Screws Brass #8-32  
Hex Head Grounding Screw Steel (Green)  
Mounting Screws Zinc-plated steel

## Additional Specifications for Hard Use TVSS Spec Grade Quads

- ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45
- Installation Categories "A" (ring wave) and "B" (unidirectional impulse)

### Electrical

MOV Rating 18mm  
UL1449 Suppressed Voltage Rating 500V (L-N, L-G, N-G)  
Noise Attenuation -35db Noise Filtering at 5kHz-50MHz  
Thermal Protection Fused  
Green LED Indicator ON when protection is active, OFF when protection is inactive

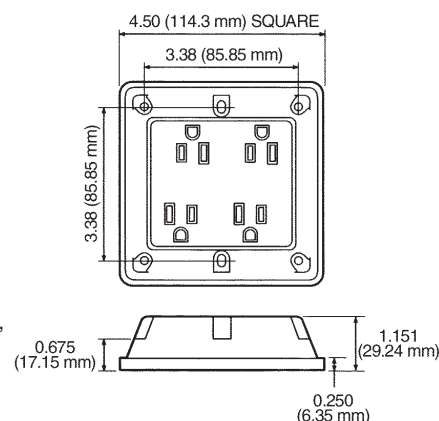

Quad Receptacle



All devices listed on this page conform to NEMA WD-1 and WD-6.