



■ STRAIGHT BLADE PLUGS & CONNECTORS

Pass & Seymour

legrand

Straight Blade Plugs & Connectors

Pass & Seymour



Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire.

Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity; ground pin is reinforced for added strength and safety.

See-through, thermoplastic terminal chamber for clear view of terminals and wire connections.

Color-coded terminal screws are positioned on same plane and backed-out for fast installation.

Double-wipe, firm-grip ground contact and triple-wipe power contacts guarantee a superior connection.

Tapered wire wells guide conductors into captivated, staked clamping nuts.

Rugged external two-piece cord grip provides uniform pressure for superior retention of conductors.

Housing is keyed for fast alignment with terminal section.

Internal dust shield keeps terminals free of contaminants.

Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.

PS5266-X and PS5269-X

Recessed cord-grip screw reduces screwdriver slippage, improves safety.

Ready-to-wire and ready-to-perform under adverse plant conditions — our Straight Blade Plug & Connector line is an industrial-strength, on-the-job asset.

Index

Device	Rating	Page Number
NEMA Configurations		G-2
Hospital Grade	15 & 20A, 125 & 250V	G-3
Extra-Hard Use Specification Grade	15 & 20A, 125 & 250V	G-4
Extra-Hard Use Angled Devices	15 & 20A, 125 & 250V	G-5
Extra-Hard Use Ground Continuity Monitoring	15 & 20A, 125 & 250V	G-6
Gator Grip Devices	15, 20, 30, 50 & 60A, 125, 250, 277 & 125/250V, 3 ϕ 250V, 3 ϕ Y 120/208V	G-7
MaxGrip® M ³	15 & 20A, 125 & 250V	G-8
Rubber & Watertight Plugs & Connectors	15 & 20A, 125 & 250V	G-9
Dead Front Devices, Flanged Inlets & Outlets	15 & 20A, 125 & 250V	G-10
Miscellaneous Configurations		G-11
Product Specifications & Performance		G-12 – G-13

Straight Blade Plugs & Connectors NEMA Configurations

Straight Blade Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding										
125V	1 1-15R									
250V	2			2-20P						
2 Pole, 3 Wire Grounding										
125V	5 5-15R	5-15P	5-20R	5-20P	5-30P	5-30P		5-50P		
250V	6 6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
277VAC	7 7-15R	7-15P	7-20R	7-20P		7-30P		7-50P		
3 Pole, 3 Wire Non-Grounding										
125/250V	10		10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 Pole, 4 Wire Grounding										
125/250V	14		14-20R	14-20P	14-30R	14-30P	14-50R	14-50P		14-60P
3ø250V	15			15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P
4 Pole, 4 Wire Non-Grounding										
3øY 120/208V	18		18-20R	18-20P					18-60R	18-60P

Open Slots

Indicate receptacle configurations (female).




Closed Slots

Indicate plug blade configurations (male).



Labels and Their Meanings

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

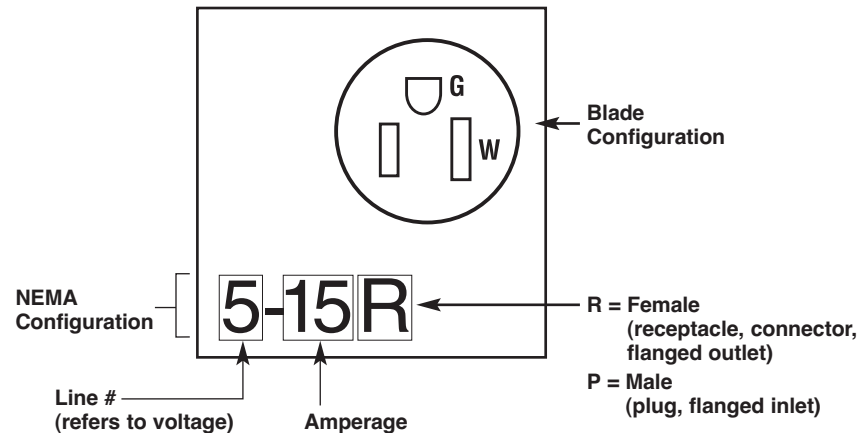

Straight Blade Plugs & Connectors Hospital Grade Plugs & Connectors


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20
Suitability


Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

Pass & Seymour




PS5266-XHG



PS5269-XHG



PS5266-HGAN




PS8115



PS8119

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596	CS C22.2 No. 42
Hospital Grade – Extra-Hard Use (EHU)							
PS5266-XHG	15 125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266-HGAN	15 125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269-XHG	15 125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366-XHG	20 125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366-HGAN	20 125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369-XHG	20 125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666-XHG	15 250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666-HGAN	15 250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669-XHG	15 250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466-XHG	20 250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466-HGAN	20 250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469-XHG	20 250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
Hospital Grade MaxGrip® M³							
PS8115	15 125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15 125	Connector, Gray	.230"-.720"	5-15R	•	•	•

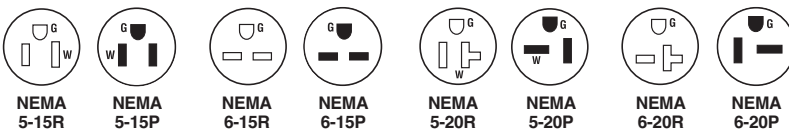

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22-GL	EHU-Strain Relief Grip*
FC30-GL	EHU-Strain Relief Grip*
FC40-GL	EHU-Strain Relief Grip*
FC52-GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors

Hospital Grade Plugs & Connectors

Pass & Seymour



Straight Blade Plugs & Connectors Extra-Hard Use (EHU) Specification Grade


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20


Suitability

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on all Specification Grade plugs and connectors.
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.




PS5266-X



PS5269-X

NEW

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596	CS C22.2 No. 42
EHU – Specification Grade							
PS5266-X	15 125	Plug, Black & White	.230"-.720"	5-15P	•	•	•
PS5266-XGRY	15 125	Plug, Black & Gray	.230"-.720"	5-15P	•	•	•
PS5266-XBK	15 125	Plug, Black	.230"-.720"	5-15P	•	•	•
CR5266-X	15 125	Plug, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15P	•	•	•
PS5269-X	15 125	Connector, Black & White	.230"-.720"	5-15R	•	•	•
PS5269-XGRY	15 125	Connector, Black & Gray	.230"-.720"	5-15R	•	•	•
PS5269-XBK	15 125	Connector, Black	.230"-.720"	5-15R	•	•	•
CR5269-X	15 125	Connector, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15R	•	•	•
PS5366-X	20 125	Plug, Black & White	.230"-.720"	5-20P	•	•	•
PS5369-X	20 125	Connector, Black & White	.230"-.720"	5-20R	•	•	•
PS5666-X	15 250	Plug, Black & White	.230"-.720"	6-15P	•	•	•
PS5669-X	15 250	Connector, Black & White	.230"-.720"	6-15R	•	•	•
PS5466-X	20 250	Plug, Black & White	.230"-.720"	6-20P	•	•	•
PS5469-X	20 250	Connector, Black & White	.230"-.720"	6-20R	•	•	•
PS5766-X	15 277	Plug, Black & White	.230"-.720"	7-15P	•	•	•
PS5866-X	20 277	Plug, Black & White	.385"-1.150"	7-20P	•	•	•

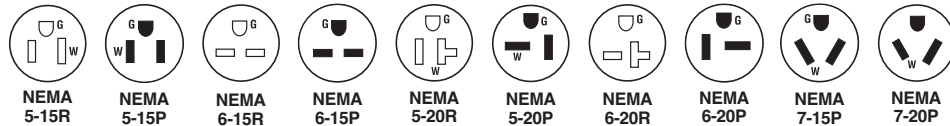

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
L15-RBC	Weatherproof Boot-Connector*
L15-RBP	Weatherproof Boot-Plug*
FC22-GL	EHU-Strain Relief Gript
FC30-GL	EHU-Strain Relief Gript
FC40-GL	EHU-Strain Relief Gript
FC52-GL	EHU-Strain Relief Gript

*For further information consult the Turnlok® Section H.
† For further information consult the Flexcor® Section K.

Straight Blade Plugs & Connectors Extra-Hard Use (EHU) Angled Devices

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


IP20
Suitability

Pass & Seymour




Features – Extra-Hard Use (EHU)


- Angle plugs and adapters both allow for 4-position face rotation.
- Tri-drive assembly and cord-grip screws are standard on all angle adapters.
- Angle adapter (sold separately as catalog number EHU15AN) will accommodate all Pass & Seymour EHU-style Straight Blade plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.



PS5266-HGAN



PS5266-SSAN



EHU15AN

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL UL498	FSUL WC596	CSA C22.2 No. 42
EHU – Hospital Grade							
PS5266-HGAN	15 125	Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5366-HGAN	20 125	Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5666-HGAN	15 250	Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5466-HGAN	20 250	Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
EHU – Specification Grade							
PS5266-SSAN	15 125	Plug, Black & White	.320"-.655"	5-15P	•	•	•
PS5366-SSAN	20 125	Plug, Black & White	.320"-.655"	5-20P	•	•	•
PS5666-SSAN	15 250	Plug, Black & White	.320"-.655"	6-15P	•	•	•
PS5466-SSAN	20 250	Plug, Black & White	.320"-.655"	6-20P	•	•	•

NEW

NEW



NEMA 5-15P



NEMA 6-15P



NEMA 5-20P



NEMA 6-20P

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter




Straight Blade Plugs & Connectors Extra-Hard Use Ground Continuity Monitoring (GCM) Plugs & Connectors


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Features – Extra-Hard Use (EHU) Straight Blade GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive two-piece cord grip accepts a wide range of cord widths. Provides more consistent pressure for superior conductor retention.
- Internal dust shield keeps terminals free of contaminants.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are positioned on the same plane and backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.



PS5266-XGCM



PS5269-XGCM

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
						cULus	FSUL WC596
EHU – GCM							
PS5266-XGCM	15	125	Plug, Black & White	.230"-.720"	5-15P	•	•
PS5266-XGCMAN	15	125	Angled Plug, Black & White	.320"-.655"	5-15P	•	•
PS5269-XGCM	15	125	Connector, Black & White	.230"-.720"	5-15R	•	•
PS5366-XGCM	20	125	Plug, Black & White	.230"-.720"	5-20P	•	•
PS5366-XGCMAN	20	125	Angled Plug, Black & White	.320"-.655"	5-20P	•	•
PS5369-XGCM	20	125	Connector, Black & White	.230"-.720"	5-20R	•	•
PS5666-XGCM	15	250	Plug, Black & White	.230"-.720"	6-15P	•	•
PS5666-XGCMAN	15	250	Angled Plug, Black & White	.320"-.655"	6-15P	•	•
PS5669-XGCM	15	250	Connector, Black & White	.230"-.720"	6-15R	•	•
PS5466-XGCM	20	250	Plug, Black & White	.230"-.720"	6-20P	•	•
PS5466-XGCMAN	20	250	Angled Plug, Black & White	.320"-.655"	6-20P	•	•
PS5469-XGCM	20	250	Connector, Black & White	.230"-.720"	6-20R	•	•



NEMA 5-15R



NEMA 5-15P



NEMA 6-15R



NEMA 6-15P



NEMA 5-20R



NEMA 5-20P



NEMA 6-20R



NEMA 6-20P


Straight Blade Plugs & Connectors Gator Grip Devices

Pass & Seymour




Straight Blade Plugs & Connectors


- | Features – Gator Grip Devices | |
|---|---|
| <ul style="list-style-type: none"> ■ Gator Grip Jaws grab cord tighter as you hand turn the housing. ■ Nylon jaws grip securely, but won't damage insulation. ■ Self-locking Dardelet Thread holds securely and assures firm clamping. ■ Fast wiring — simply insert stranded conductors into individual wiring chambers and tighten oversized terminal screws. | <ul style="list-style-type: none"> ■ Transparent wiring chamber cover allows visual inspection of wiring chambers to assure proper connections. ■ Sloped shoulders won't catch or snap. ■ Automatic cord centering. ■ Brilliant high-visibility yellow. ■ Neoprene Dust Seal helps keep out dirt & debris. ■ Dead front construction. |




D0531




D0533



D0651




D0653



1431

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
					UL UL498	FSUL WC596
2 Pole, 3 Wire Grounding 30 & 50A, 125, 250 & 277V						
D0531	30 125	Plug, Yellow	.57"-1.26"	5-30P	•	•
D0533	30 125	Connector, Yellow	.57"-1.26"	5-30R	•	•
D0551	50 125	Plug, Yellow	.57"-1.26"	5-50P	•	•
D0553	50 125	Connector, Yellow	.57"-1.26"	5-50R	•	•
D0631	30 250	Plug, Yellow	.57"-1.26"	6-30P	•	•
D0633	30 250	Connector, Yellow	.57"-1.26"	6-30R	•	•
D0651	50 250	Plug, Yellow	.57"-1.26"	6-50P	•	•
D0653	50 250	Connector, Yellow	.57"-1.26"	6-50R	•	•
D0731	50 277	Plug, Yellow	.57"-1.26"	7-30P	•	•
D0751	50 277	Plug, Yellow	.57"-1.26"	7-50P	•	•
3 Pole, 3 Wire 30 & 50A, 125/250V						
1031	30 125/250	Plug, Yellow	.57"-1.26"	10-30P	•	•
1033	30 125/250	Connector, Yellow	.57"-1.26"	10-30R	•	•
1051	50 125/250	Plug, Yellow	.57"-1.26"	10-50P	•	•
1053	50 125/250	Connector, Yellow	.57"-1.26"	10-50R	•	•
3 Pole, 4 Wire 30 & 50A, 125/250V						
1431	30 125/250	Plug, Yellow	.57"-1.26"	14-30P	•	•
1451	50 125/250	Plug, Yellow	.57"-1.26"	14-50P	•	•
4 Pole, 4 Wire 60A, 3øY 120/208V						
D1861	60 3øY 120/208	Plug, Yellow	.57"-1.26"	18-60P	•	•

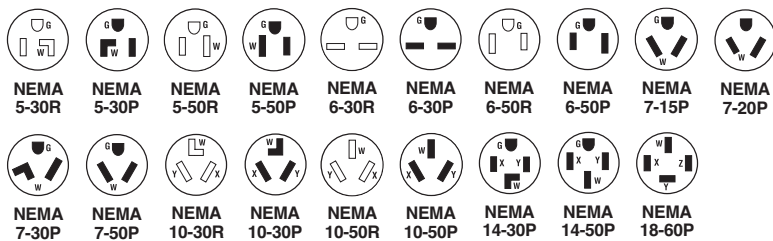

Catalog Number	Description
Accessories	
BOOT15	15 & 20A Straight Blade Boots for added protection
BOOT20	20A Straight Blade Boots for added protection
BOOT50	50A Straight Blade Boots for added protection

For further information consult Page H-31.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Gator Grip Devices

Pass & Seymour




Straight Blade Plugs & Connectors

MaxGrip® M³

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Hospital Grade version displays the Hospital Grade green dot.

High-visibility yellow and orange, or gray.



PS5965-Y



PS5969-Y



PS5965-O



PS5969-O

Enclosed terminals provide solid, internally-clamped connections.

Molded finger grips promote safe, sure handling.

Self-hinge swings wide open to make quick, easy work of tight, clean connections. Insert conductors into terminals and tighten terminal screws; close hinge housing around cord and tighten housing screws.

Tough nylon construction with crush/impact resistance that exceeds hospital grade and Fed Spec requirements; arc resistance exceeds UL requirements.

PS5965-Y and PS5969-Y

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
					cULus	FSUL WC596
Hospital Grade MaxGrip® M³						
PS8115	15 125	Hospital Grade Plug, Gray	.230"-.720"	5-15P	•	•
PS8119	15 125	Hospital Grade Connector, Gray	.230"-.720"	5-15R	•	•
MaxGrip M³						
PS5965-Y	15 125	Plug, Yellow	.230"-.720"	5-15P	•	•
PS5965-GRY	15 125	Plug, Gray	.230"-.720"	5-15P	•	•
PS5965-IG	15 125	Plug, Orange, for use with equipment restricted to isolated ground receptacles	.230"-.720"	5-15P	•	•
PS5965-O	15 125	Plug, Orange	.230"-.720"	5-15P	•	•
PS5969-Y	15 125	Connector, Yellow	.230"-.720"	5-15R	•	•
PS5969-GRY	15 125	Connector, Gray	.230"-.720"	5-15R	•	•
PS5969-O	15 125	Connector, Orange	.230"-.720"	5-15R	•	•
PS5364-Y	20 125	Plug, Yellow	.230"-.720"	5-20P	•	•
PS5364-GRY	20 125	Plug, Gray	.230"-.720"	5-20P	•	•
PS5369-Y	20 125	Connector, Yellow	.230"-.720"	5-20R	•	•
PS5369-GRY	20 125	Connector, Gray	.230"-.720"	5-20R	•	•
PS5666-Y	15 250	Plug, Yellow	.230"-.720"	6-15P	•	•
PS5669-Y	15 250	Connector, Yellow	.230"-.720"	6-15R	•	•
PS5464-Y	20 250	Plug, Yellow	.230"-.720"	6-20P	•	•
PS5469-Y	20 250	Connector, Yellow	.230"-.720"	6-20R	•	•



NEMA 5-15R



NEMA 5-15P



NEMA 6-15R



NEMA 6-15P



NEMA 5-20R



NEMA 5-20P



NEMA 6-20R



NEMA 6-20P

Straight Blade Plugs & Connectors Rubber & Watertight Plugs & Connectors

Pass & Seymour




IP67
Suitability


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Features


- Rubber body construction stands up to impacts, oil, chemicals, heat and weather.
- Floating blades allow self-alignment with contacts and reduce stress on blades and contacts.
- Neoprene grommet keeps out contaminants at cord entrance.
- Terminal screws come backed-out – ready-to-wire.
- Nickel-plated blades and connectors provide an extra measure of corrosion resistance.
- Closure cap on watertight model forms a seal to keep out contaminants when connector is not in use.
- Multiple seals between plug and connector on watertight version protects electrical connection from contaminants.



1447




1547



14W47

Shown with 14WPS (cap).
Sold separately.




15W47

Catalog Number	Rating A. V.	Description	NEMA Config. No.	3rd Party Compliance	
				UL UL498	CS C22.2 No. 42
Straight Blade					
1447	15 125	Rubber Straight Blade Plug	5-15P	•	•
1547	15 125	Rubber Straight Blade Connector	5-15R	•	•
1433P	20 125	Rubber Straight Blade Plug	5-20P	•	•
1533	20 125	Rubber Straight Blade Connector	5-20R	•	•
1449	15 250	Rubber Straight Blade Plug	6-15P	•	•
1549	15 250	Rubber Straight Blade Connector	6-15R	•	•
1448	20 250	Rubber Straight Blade Plug	6-20P	•	•
1548	20 250	Rubber Straight Blade Connector	6-20R	•	•

NEMA 4X – Watertight Devices

Catalog Number	Rating A. V.	Description	NEMA Config. No.	3rd Party Compliance	
				UL UL498	CS C22.2 42M
14W47	15 125	NEMA 4X Straight Blade Plug	5-15P	•	•
15W47	15 125	NEMA 4X Straight Blade Connector	5-15R	•	•
14W33	20 125	NEMA 4X Straight Blade Plug	5-20P	•	•
15W33	20 125	NEMA 4X Straight Blade Connector	5-20R	•	•
14W49	15 250	NEMA 4X Straight Blade Plug	6-15P	•	•
15W49	15 250	NEMA 4X Straight Blade Connector	6-15R	•	•
14W48	20 250	NEMA 4X Straight Blade Plug	6-20P	•	•
15W48	20 250	NEMA 4X Straight Blade Connector	6-20R	•	•

Catalog Number	Rating A. V.	Description	NEMA Config. No.	3rd Party Compliance	
				UL UL498	CS C22.2 42M
Caps – Watertight Only					
14WPS		Male Cap	All	•	•
50W50PS		Female Replacement Cap	All	•	•

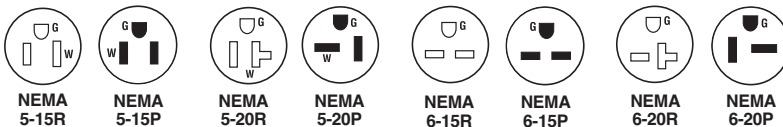

(Inch)	A	B	C	D	E
Rubber Straight Blade Plug					
15A	2.27"	1.44"	1.53"	1.53"	
20A	2.59"	1.76"	1.93"	1.60"	
Rubber Straight Blade Connector					
15A	2.99"	2.16"	1.53"	1.66"	1.53"
20A	3.74"	2.19"	1.93"	2.07"	1.60"
Cord Grip Range: .335"-.640"					

(Inch)	A	B
Watertight Plug		
15A	2.62"	1.85"
20A	2.62"	1.85"
Watertight Connector		
15A	4.03"	1.85"
20A	4.03"	1.85"
Cord Grip Range: .062"-.625"		

All devices listed on this page conform to NEMA WD-1 and WD-6.

Pass & Seymour




Straight Blade Plugs & Connectors Dead Front Devices, Flanged Inlets & Outlets

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


IP20
Suitability




5276-BK




5296-BK



5278-SS



5279-SS



4867-Y

Features

Dead Front

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- All nylon construction, provides excellent impact and chemical resistance.
- Simple turn and twist assembly providing quick installation.

Flanged Inlets/Outlets


- Molded of high-impact and chemical-resistant thermoplastic material.
- NEMA configuration information molded onto device flange, allows for easy field identification.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
					UL498	FSUL WC596
Dead Front Plugs & Connectors						
5276-BK	15 125	Plug, Black	.230"-.655"	5-15P	•	•
5296-BK	15 125	Connector, Black	.230"-.655"	5-15R	•	•
5765-BK	20 125	Plug, Black	.230"-.655"	5-20P	•	•
5374-BK	20 125	Connector, Black	.230"-.655"	5-20R	•	•
5666-BK	15 250	Plug, Black	.230"-.655"	6-15P	•	•
5669-BK	15 250	Connector, Black	.230"-.655"	6-15R	•	•
5864-BK	20 250	Plug, Black	.230"-.655"	6-20P	•	•
5866-BK	20 250	Connector, Black	.230"-.655"	6-20R	•	•
Flanged Inlets & Outlets						
5278-SS	15 125	Inlet, Gray		5-15P	•	•
5278-SSBK	15 125	Inlet, Black		5-15P	•	•
5279-SS	15 125	Outlet, Gray		5-15R	•	•
5279-SSBK	15 125	Outlet, Black		5-15P	•	•
5378-SS	20 125	Inlet, Gray		5-20P	•	•
5379-SS	20 125	Outlet, Gray		5-20R	•	•
5678-SS	15 250	Inlet, Gray		6-15P	•	•
5679-SS	15 250	Outlet, Gray		6-15R	•	•
5478-SS	20 250	Inlet, Gray		6-20P	•	•
5479-SS	20 250	Outlet, Gray		6-20R	•	•

Catalog Number	Description
Accessories	
WPG-1	Weatherproof Cover for Flanged Inlets and Outlets

For further information consult the Weatherproof Section R.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
					cULus	cULus
Medium-Duty Plugs & Connectors						
4867-Y	15 125	Plug, Yellow	.250-.600"	5-15P	•	•
4887-Y	15 125	Connector, Yellow	.250-.600"	5-15R	•	•

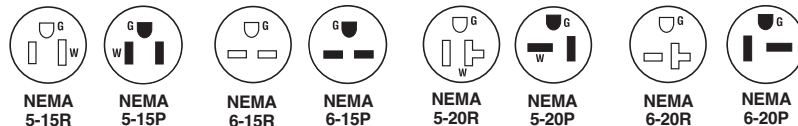

Straight Blade Plugs & Connectors Miscellaneous Configurations

Pass & Seymour



IP20
Suitability


Catalog Number	Rating		Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
	A.	V.				UL	FSUL	CS
2 Pole, 3 Wire Grounding								
4337-9	30	125	Angled Plug, Yellow		5-30P			
4339-9	50	125	Angled Plug, Yellow		5-50P			
3869	30/50	250	Angled Plug, Black	.56"-1.1"	6-30P/6-50P	•		
3 Pole, 3 Wire Non-Grounding								
3861	30/50	125/250	Angled Plug, Black	.56"-1.1"	10-30P/10-50P	•		
9977	20	125/250	Plug, Nylon		10-20P	•		
9750-DF	10	250	Plug, with Nylon Insert		NON-NEMA			
7088	20	125/250	Connector, Armored		10-20R			
3 Pole, 4 Wire Grounding								
5746-AN	30	125/250	Angled Plug, Yellow		14-30P	•		
5741-AN	30	3ø, 250	Angled Plug, Yellow		15-30P	•	•	
5745-AN	50	125/250	Angled Plug, Yellow		14-50P		•	
1462-9	60	125/250	Angled Plug, Yellow		14-60P			
5751-AN	50	3ø, 250	Angled Plug, Yellow		15-50P	•	•	
5761-AN	60	3ø, 250	Angled Plug, Yellow		15-60P	•	•	
3867	30/50	125/250	Angled Plug, Black	.56"-1.1"	14-30P/14-50P	•	•	
4 Pole, 4 Wire Non-Grounding								
7251-DF	20	3øY, 120/208	Plug, Yellow	.365"-.775"	18-20P	•	•	
8302-AN	60	3øY, 120/208	Angled Plug, Yellow		18-60P	•		




3869




3861




3867

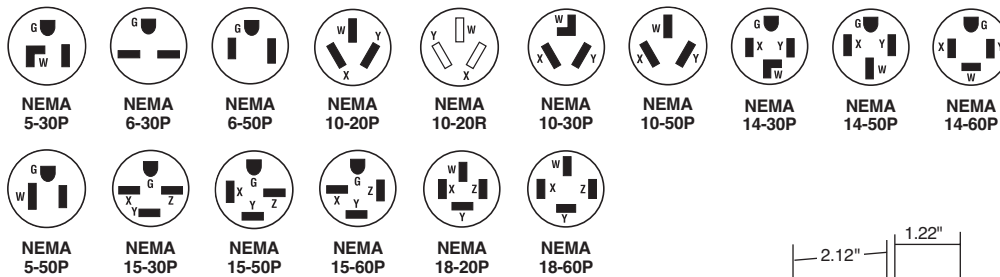

7088




7251-DF




5741-AN



9977



9750-DF



8302-AN

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors

Product Specifications & Performance

EHU & Corrosion-Resistant Plugs & Connectors

15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	*Brass
Terminal Clamp	*Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	*Brass
Terminal Clamp	*Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	.230"-.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

EHU Ground Continuity Monitoring (GCM) Plugs & Connectors

15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	.230" - .720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

* Nickel-Plated for Corrosion-Resistant Product.

Straight Blade Plugs & Connectors Product Specifications & Performance

Pass & Seymour



Gator Grip Devices Plugs & Connectors 30, 50 & 60A Straight Blade	
Plugs	
Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel
Connectors	
Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Polypropylene
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	Up to 277V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	.570"-1.260" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#10 AWG min.– #4 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V0
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

MaxGrip® M³ Plugs & Connectors	
Plug	
Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Blades	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel
Connector	
Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Contacts	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.23" thru .72" diameter cord
Terminal Identification	Green = Ground; Zinc = Neutral; Brass = Hot
Terminal Accommodation	#18 AWG min.– #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability Rating	UL94 HB
Operating Temperatures	Maximum continuous: +75°C; Minimum: -40°C without impact

NEMA Configuration	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.