



COVID-19

Workplace Resources

Plan, Prepare Respond

The Centers for Disease Control & Prevention have posted interim guidance for businesses and employers to plan, prepare and respond to the Coronavirus Disease 2019 (COVID-19).

This guidance and other important COVID-19 related information can be viewed at cdc.gov.

The health and safety of their employees is a top priority for every business. The COVID-19 pandemic has impacted everyone and is forcing every business to address the issues of how keep business open, and up and running while protecting employees during the process.

As employers consider how best to mitigate the spread of COVID-19 and lower the impact in their workplace, some key factors to consider are:

- ✓ reducing transmission among employees,
- ✓ maintaining healthy business operations, and
- ✓ maintaining a healthy work environment.

Everyone at Womack Electric Supply knows these are trying times and we continue to keep our thoughts with everyone who is affected by this pandemic. We are all in this together and we want to do all we can to help you to plan, prepare and respond to get your business back to business during and after COVID-19.

Womack Electric Supply is open, and ready to serve you. Our proactive team remains vigilant and agile so that we can continue to respond in a way that protects our people and our customers while still serving our very essential business partners. We remain committed to providing you with the product and service resources you need to continue working safety, while protecting the health of your employees.



HAND SANITIZERS

COVID-19 PREVENTION



Clean **16 Ounce Pump Action FREAK** Part #: SANITIZER 16P HAND SANITIZER

1 Gallon Jug

Part #: SANITIZER 128

Active Ingredient: Alcohol 65% v/v Inactive Ingredients: Glycerin, hydrogen peroxide, purified water USP.

Alcohol Antiseptic 65% Topical Use Only Non Sterile

WASH YOUR HANDS

LENTEK 250 Gallon Tote – Product # 2472700 **LENTEK 54 Gallon Drum** – Product # 2472600 **LENTEK 5 Gallon Pail** – Product # 2472500 **FDA & TTB Certified** 80% Ethanol Alcohol



Kills Up to 99%









DISPOSABLE

FACE MASKS

KN95 Masks

Approved for use in the US by the CDC as N95 Compliant

KN95 are shipped 40 per case, 240 cases (9,600 masks) per pallet

FFP2 Masks

FFP2 are shipped 50 per case, 576 cases (28,800 masks) per pallet

Contractors & Industry Workers - You're Essential!

We're Here to Support You ...




FFP2 Disposable Face Mask
Type: FFP2 EU Standard EN 149-2001

Part #: FM-FFP2-01

Filter Performance ≥ 94% Flow Rate: 95 L/min

Total Inward Leakage (TIL): ≤ 8% leakage Inhalation Resistance: ≤ 240 Pa (at 95 L/min






Packing: 1 Box (50-Pack)

Dimensions: (L) 8" x (W) 4" x (H) 4"

Weight: 0.5 Lbs. / Box



Masks currently available with a 1-2 week lead time (Shipments arrive in NJ every other day). Minimums for freight allowed – direct ship orders: FFP2 1000 pcs. / KN95 280 pcs. Orders of pallet quantities take precedence. All orders are non-cancelable and non-returnable.



Type: KN95 GB2626-2006 Standard

Part #: FM-KN95-01

Filter Performance ≥ 95% Flow Rate: 85 L/min

Total Inward Leakage (TIL): ≤ 8% leakage Inhalation Resistance: ≤ 350 Pa (at 85 L/min

FDA Certified [21 CFR 878.4040

Packing: 1 Box (40-Pack)

Dimensions: (L) 8" x (W) 4" x (H) 4"

Weight: 0.5 Lbs. / Box









"What Customer Service Is About!"








FR1 Face Shield

Made and Fully Assembled in the USA







Key Features & Benefits

FDA approved wide lens material with uncompromised peripheral, upward and downward vision.

Lightweight design that fastens securely to your head ensuring the face shield moves with you.

Industrial foam padding for increased comfort.


Easy surgical tie lets you tie this once and forget about it.

Easily removed and put back on without re-tying.

The FR1 shield is to be used in accordance with CDC guidelines for emergency use only.

Compatible with N95 type masks. N95 mask NOT included.

Ensure you are using respiratory protection, this device is NOT a respirator.

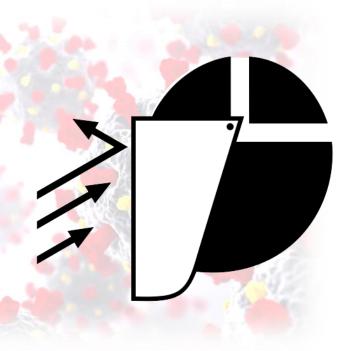



adorne® Wave Style Switches

ASWV1532

Wave Style Switches

adorne® Wave Style Switches feature innovative technology combined with sleek, contemporary design. Simply wave your hand in front of the switch to turn lights on and off. The Wave is ideal for areas where touch free lighting automation is preferred. It has a preset sensor distance of approximately 4". However, this can easily be adjusted to sense movement from 1" to 6" in front of switch. Wave Switch includes a Locator Status Light which adds illumination and makes it easier to locate in the dark.





Wave Switch Applications

- Offices
- Conference Rooms
- Hallways
- Break Rooms
- Restrooms
- Entryways

1. Select Wave™ Switch













Switch and wall plate sold separately. Sample plates shown - multiple styles available.

ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION	RATING	COMPATIBLE LOADS	COMPLIANCE	COLORS
ASWV1532M2	Single-Pole/3-Way	15A, 120VAC, 1/2Hp	All Loads	C Us us	Magnesium
ASWV1532W2	Single-Pole/3-Way	15A, 120VAC, 1/2Hp	All Loads	C LISTED US	White
ASWV1532G2	Single-Pole/3-Way	15A, 120VAC, 1/2Hp	All Loads	C (UL) US	Graphite





Leviton Antimicrobial Devices: Combat the Spread of Germs with a Complete Antimicrobial Solution.



Antimicrobial Treated Switches

- 20 A 120/277 VAC
- Available in Toggle, Decora Plus, and Lev-Lok configurations with the toggle or rocker embedded with silver ion antimicrobial technology
- Single pole and three-way functionality





Antimicrobial Treated Wallplates

- Stainless Steel wallplate and mounting screws treated with antimicrobial polyurethane powder coating
- Available in single- or double-gang configurations
- Powder coating resists fingerprints and has been tested to ISO 7784.2 for durability

Designed for Habitual Abuse...

TOUGH and CLEAN. Made durable in order to withstand harsh chemical cleaning products, stringent washings, and UV lights with minimal wear and tear. Inhibits 99.9% of bacterial growth on frequently touched switches and wallplates in between normal cleanings. Leviton Antimicrobial Switches are made of thermoset urea, making them more resistant to chemicals and ensuring a longer service life.



Antimicrobial Treated Devices from Leviton are manufactured by incorporating silver ions (Ag+) as the antimicrobial agent in the product material. This material has been tested to the international standard JIS Z 2801:2000 and has been shown to be 99.9% effective in reducing the growth of harmful bacteria.









Help stop the spread

COVID-19 Safety Solutions

In partnership with Brady, Womack Electric Supply is supplying signs and signage solutions to help fight COVID-19 during this rapidly changing global challenge. With healthcare and public access signage as priority, these signage solutions are key reminders of what to do to help stop the spread of the virus. Check out what's available for your needs right now, and visit BradyID.com/COVID19 for more products and updates.

For signage, posters, printing systems and more, Womack Electric Supply and Brady are ready to assist you.



Size H x W	B#
7 in. x 10 in.	B-401
10 in. x 14 in.	B-401
7 in. x 10 in.	B-302
10 in. x 14 in.	B-302
7 in. x 10 in.	B-555
10 in. x 14 in.	B-555
	7 in. x 10 in. 10 in. x 14 in. 7 in. x 10 in. 10 in. x 14 in. 7 in. x 10 in.



Catalog #	Size H x W	B#
170196	7 in. x 10 in.	B-401
170197	10 in. x 14 in.	B-401
170198	7 in. x 10 in.	B-302
170199	10 in. x 14 in.	B-302
170200	7 in. x 10 in.	B-555
170201	10 in. x 14 in.	B-555



Catalog #	Size H x W	B#
170295	10 in. x 14 in.	B-401
170296	10 in. x 14 in.	B-555



170202	7 in. x 10 in.	B-401
170203	10 in. x 14 in.	B-401
170217	7 in. x 10 in.	B-302
170204	10 in. x 14 in.	B-302
170205	7 in. x 10 in.	B-555
170206	10 in. x 14 in.	B-555



170283	7 in. x 10 in.	B-401
170284	10 in. x 14 in.	B-401
170285	7 in. x 10 in.	B-302
170286	10 in. x 14 in.	B-302
170287	7 in. x 10 in.	B-555
170288	10 in. x 14 in.	B-555



170297	10 in. x 14 in.	B-401
170298	10 in. x 14 in.	B-555



170323	7 in. x 10 in.	B-401
170324	10 in. x 14 in.	B-401
170325	7 in. x 10 in.	B-302
170326	10 in. x 14 in.	B-302
170327	7 in. x 10 in.	B-555
170328	10 in. x 14 in.	B-555



170261	7 in. x 10 in.	B-401
170268	7 in. x 10 in.	B-302
170269	7 in. x 10 in.	B-555



170299	10 in. x 14 in.	B-401
170300	10 in. x 14 in.	B-555



170317	7 in. x 10 in.	B-401
170318	10 in. x 14 in.	B-401
170319	7 in. x 10 in.	B-302
170320	10 in. x 14 in.	B-302
170321	7 in. x 10 in.	B-555
170322	10 in. x 14 in.	B-555

AVISC)
DEBIDO AL COVID- NO SE PERMITEN VIS SIN AUTORIZACIO A PARTIR DE ESTE PU	ITAS N

170271	7 in. x 10 in.	B-401
170273	7 in. x 10 in.	B-302
170275	7 in. x 10 in.	B-555



170301	10 in. x 14 in.	B-401
170302	10 in. x 14 in.	B-555



170174	7 in. x 10 in.	B-401
170175	10 in. x 14 in.	B-401
170176	7 in. x 10 in.	B-302
170177	10 in. x 14 in.	B-302
170178	7 in. x 10 in.	B-555
170179	10 in. x 14 in.	B-555

AVISO
DISTANCIA FISICA
EN PRACTICA
6ft (2m) COMO DISTANCIA MINIMA

170264	7 in. x 10 in.	B-401
170265	7 in. x 10 in.	B-302
170266	7 in. x 10 in.	B-555

SOCIAL DISTANCING To support public health, please maintain a minimum distance of 6 R/2 m	ř
100 TO \$10	

170303	10 in. x 14 in.	B-401
170304	10 in. x 14 in.	B-555

POR SEGURIDAD DE NUESTROS CLIENTES Y EMPLEADOS		
PROMINE TO SEASON TO SEASO		
SI TIENES O RECIENTEMENTE HAS TENIDO FIEBRE, TOS, O		
DIFICULTAD PARA RESPIRAR POR FAVOR NO ENTRES.		

170307	7 in. x 10 in.	B-401
170308	10 in. x 14 in.	B-401
170309	7 in. x 10 in.	B-302
170310	10 in. x 14 in.	B-302
170311	7 in. x 10 in.	B-555
170312	10 in. x 14 in.	B-555

NOTICE		
PHYSICAL DISTANCING		
IN PRACTICE		
6ft (2m) MINIMUM DISTANCE		

170277	7 in. x 10 in.	B-401
170262	7 in. x 10 in.	B-302
170263	7 in. x 10 in.	B-555

DISTANCIAMIENTO SCCIAL Practical properties and political profession, manifoliam, data alian, alian.

1/0305	10 in. x 14 in.	B-401
170306	10 in. x 14 in.	B-555

B# sign selection guide:

B-401 Plastic Sign

B-302 Polyester Sign

B-555 Aluminum Sign

B-819 Anti-Skid Polyester Floor Sign

B-514 ToughStripe Floor Tape

B-534 Anti-Skid Circular Floor Sign



REDUCE LA TRANSMISION DE ENFERMEDADES

 LAVATE LAS MANOS PARA EMTAR EL CONTAGIO DE GERMENES
 EMTIA CONTAGIANTE DE GERMENES TUS MANOS LIMPIAS AL ESTOPHUDIAR O TOCER EN TU ANTERRAZO USA SAMTIZANTE DE INAVERA FRECUENTE PARA LIMPIAR LAS SUPERFICES QUE ESTEN EN USO COMO EL TELEFONO, TECLADOS, LLAVES DE AGUA, CHAPAS DE PUERTAS PARA NO ESPARCIR LOS CEDIMENES.

SANITIZED

DATE

Catalog #	Size H x W	B#
170272	10 in. x 14 in.	B-401
170274	10 in. x 14 in.	B-555

_			
s	170276	10 in. x 14 in.	B-401
	170278	10 in. x 14 in.	B-555

170276	10 in. x 14 in.	B-401
170278	10 in. x 14 in.	B-555

170276	10 in. x 14 in.	B-401
170278	10 in. x 14 in.	B-555
-		

T	→ T
Distanciam	niento Social
Mantener al re- de distancia	ence 6 pies (2m)
STOP THE	SPREAD OF
	SPREAD OF

AVISO

NOTICE

170289	10 in. x 7 in.	B-401
170290	14 in. x 10 in.	B-401
170291	10 in. x 7 in.	B-302
170292	14 in. x 10 in.	B-302
170293	10 in. x 7 in.	B-555
170294	14 in. x 10 in.	B-555

Catalog # Size H x W B#

10 in. x 7 in. B-401 14 in. x 10 in. B-401

10 in. x 7 in. B-302

14 in. x 10 in. B-302


10 in. x 7 in. B-555

14 in. x 10 in. B-555

10 in. x 7 in. B-401 14 in. x 10 in. B-401

10 in. x 7 in. B-302

14 in. x 10 in. B-302



170313 170314

170316

170209

170210

170211

WARNING
\mathbf{A}
S S S
QUARANTINE AREA
KEEP OUT
KELLOOI

	170211	10 in. x 7 in.	B-555
J	170212	14 in. x 10 in.	B-555
	170184	10 in. x 7 in.	B-401
	170185	14 in. x 10 in.	B-401
ı	170186	10 in. x 7 in.	B-302
	170187	14 in. x 10 in.	B-302
	170188	10 in. x 7 in.	B-555
	170189	14 in. x 10 in.	B-555

14 in. x 10 in.

10 in. x 7 in.

14 in. x 10 in.

Catalog # Size H x W

170338

170339

170340

170341

B-401 B-401

B-302

B-302



170190	10 in. x 7 in.	B-401
170191	14 in. x 10 in.	B-401
170192	10 in. x 7 in.	B-302
170193	14 in. x 10 in.	B-302
170194	10 in. x 7 in.	B-555
170195	14 in. x 10 in.	B-555



170279	14 in. x 10 in.	B-555
170280	14 in. x 10 in.	B-401




170281	14 in. x 10 in.	B-555
170282	14 in. x 10 in.	B-401



DISTANCE

170332	7 in. x 10 in.	B-401
170333	10 in. x 14 in.	B-401
170334	7 in. x 10 in.	B-555
170335	10 in. x 14 in.	B-555

170343 11 in. x 7 in. B-747



170342



170168	10 in. x 7 in.	B-401
170169	14 in. x 10 in.	B-401
170170	10 in. x 7 in.	B-302
170171	14 in. x 10 in.	B-302
170172	10 in. x 7 in.	B-555
170173	14 in. x 10 in.	B-555

Floor marking



Catalog #	Size H x W	B#
170213	14 in. x 18 in.	B-819



Catalog #	Size diameter	B#
170215	17 in.	B-534



Catalog #	Size H x L	B#
170216	4 in. x 100 ft.	B-514



170214 14 in. x 18 in. B-819



170270 B-534 17 in.



170331 4 in. x 100 ft. B-514



170260 14 in. x 18 in. B-819



170267 17 in. B-534



4 in. x 17 in. B-514



170329 14 in. x 18 in. B-819



170336 17 in.



170330 14 in. x 18 in. B-819






PORTABLE UV SANITATION CARTS



UV lights can disinfect coronavirus and bacteria in commercial and industrial facilities without needing to come into contact with surfaces or objects.

IND-CD-48-2L-UVC-50C Industrial UV Sanitation Cart - Corona Virus -400 sq. ft. Area - 50' SOOW Cord

Equipped with two UVC fluorescent lamps, this system offers 39.6 watts of output, within the 200nm - 280nm UV-C range (254 nm). The lights have an expected lifespan of 8,000+ hours and emit a flood beam pattern. This UV system covers up to 400 square feet of space with 180 degrees of coverage. Operators may move the cart around after exposure time to disinfect several sections. With a recommended 20-25 minute exposure time for viruses.



Equipped with four UVC fluorescent lamps, this system offers 79.2 watts of output, within the 200nm - 280nm UV-C range (254 nm). The lights have an expected lifespan of 8,000+ hours and emits a flood beam pattern. This UV system covers up to 800 square feet of space with 180 degrees of coverage. Operators may move the cart around after exposure time to disinfect several sections. With a recommended 20-25 minute exposure time for viruses.

IND-UC.360-48-8L-UVC-V1-AT-KT-50C Industrial UV Sanitation Cart - Corona Virus - 3500 sq. ft. Area - 304 Stainless Steel - 50' Cord

Equipped with eight UVC fluorescent lamps, this system offers 480 watts of total output, within the 200nm - 280nm UV-C range (254 nm). The lights have an expected lifespan of 13,000+ hours and emits a flood beam pattern. This UV system covers up to 3,500 square feet of space with full, 360 degrees of coverage. With a recommended 20-25 minute exposure time for viruses. Cooling fans below the lamps keep the unit running optimally.











Sentry M2 MOBILE UV DISINFECTING UNITS

With the Sentry M2, protection follows you. The Sentry M2 are affordable mobile UV disinfecting units designed for easy positioning and simple control. It emits broad spectrum UV light to eliminate up to 99.9% of the bacteria, viruses, and fungi in a space. In rooms that have been cleaned of mold, the unit will help control return growth if used routinely².

The compact units have two UV Light Engines in a lightweight, miniaturized design. Mounted on a wheeled or tripod base, the M2 units have a telescoping neck and adjustable UV head angle for perfect spot treatment where contamination is suspected.

Powered by Violet Defense™technology



Lightweight, wheeled base with locking casters and a telescoping neck for easy positioning.



Broad Spectrum UV-C, UV-B, and UV-A Light to kill bacteria and viruses.



Simple single-cycle operation with occupancy detection for safety.



Two UV Light Engines with pulsed Xenon lamp for 170° coverage over 144sf.

^{1.} Study Report August 2017, "Antimicrobial Effectiveness of Puro Device", using modified ASTM International Standard Test Method E1153.

^{2.} Research Journal of Microbiology, 2 (1), 42-49, 2007; Mycological Research, Vol. 92, Issue 3, 1989



LTK-WRISTKIT

Wrist Temperature Measurement Kit with Floor Stand

Product Overview

LTK-WRISTKIT takes a photo of every entry and stores it with wrist-measured body temperature data. Event logs can be stored and accessed via a PC software. The digital detection module supports rapid body temperature detection. Thus, the product can achieve face recognition and temperature detection at the same time, and support warning people with abnormal body temperature. It can be widely applied in the crowded places, such as smart communities, schools, office buildings, hospitals and other important areas.



Product Features

- Support non-contact detection of wrist temperature, support warning people with abnormal body temperature
- Support the detection of wrist distance, improve the accuracy of temperature measurement
- Support body temperature detection and personnel information binding, which can quickly confirm personnel information and do body temperature detection
- Support configure temperature detection threshold value, and personnel access authority can be configured through temperature detection threshold value
- Non-contact wrist temperature detection module, measurement range is between 30°C to 45°C(86°F 113°F), measurement accuracy can reach 0.1°C, measurement deviation is less than or equal to 0.3°C, and measurement distance is between 1cm to 4cm
- Deep learning algorithm model based on independent intellectual property rights, face recognition accuracy rate > 99%, false rate < 1%
- Built-in deep learning dedicated chip, supports local offline recognition, 10,000 face capacity, face whitelist (1: N)
- Fastest recognition time 0.2 seconds, various model merge mode are used to reduce false rate and increase pass rate



WDR, 2MP (1080P) low illumination wide-angle camera and F1.6 large aperture lens for capturing high quality image with various complex lighting scenes

Support anti-spoofing detection based on deep learning algorithm, effective against fraud such as photo and video

Support face metering and human metering for fast adapting to ambient light

Suggested height for face recognition: between 0.8m and 2.2m, face recognition distance: 0.2m to 2.9m

Support screen sleep mode, keep the minimum brightness to prevent glare at night

Support add up to 6 photos of the base library for a single person

Support video capture, support ONVIF protocol

Support face, card, password and QR code authentication to control door open

Two-way audio with indoor monitor

Built-in 4G EMMC front end storage, stable and reliable, up to 8,000 events capacity (with images)

Support tamper protection, support door open timeout and time exceed alarm function to keep door opening during fire alarm active

Product Specification

Features Parameter	Description
Operation System	Linux
Face Recognition Accuracy Rate	>99%
Face Recognition Time	200ms
Face Capacity	10,000
Card Capacity	100,000
Storage Capacity	4GB
Event Capacity	8,000 (with images)
Measurement Range	30°C - 45°C (86°F-113°F)
Measurement Accuracy	0.1℃
Measurement Deviation	≤0.3℃
Measurement Distance	1cm-4cm
	Face Whitelist: (1: N)
Authentication Mode	Card:(1:N)
Authentication Mode	Face +Body temperature
	Mask Detection
Door Opening Method	Face, Password, QR code, Card
Communication Mode	10/100Mbps adaptive network port
Card Type	Mifare 1 Card
User Management	Support user library addition, deletion, update
Record Management	Support local recording and real-time upload
Interface	LAN×1, Wiegand Input×1, Wiegand Output×1, RS485×1, Alarm Input×2, Alarm Output×1, USB2.0×1, Lock×1, Door Contact ×1, Exit Button×1
Power Supply	Input 12V±25% DC
Screen	Touch Screen, Size:7 inch, Resolution: 600×1024
Camera	Dual Lens, 2MP, 1080P
Supplement Light	LED soft light and infrared light
Dimensions (L×W×H)	For terminal : 134.0mm×33.0mm×305.0mm (5.28" × 1.30" × 12.0")
Working Environment	For terminal: -20°C-65°C(-4°F - 149°F), Relative Humidly<95% (non-condensing)
WORKING ENVIRONMENT	For module: 10°C-40°C(50°F - 104°F)
Protection Level	Both terminal and module: IP 54
Application Situation	Indoor, No wind

© 2020 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners





LTK – WRISTKIT QUESTIONS & ANSWERS

Q: How accurate is the temperature measurement?

A: +/- .9 degrees F (99%)

Q: How long does it take to register a person's temperature?

A: .2 seconds

Q: How long does it take to recognize someone's face?

A: The more a person encounters the unit, the quicker recognition occurs. First use is normally a couple of seconds gradually reaching a normal of .2 seconds.

Q: Is there any reason for anyone to touch the unit?

A: No. All features are non-contact. Facial recognition can occur up to 4' away and temperature scanning occurs 1" from the unit.

Q: Can I use the WristKit without connecting to my network?

A: Absolutely, The unit can "stand alone" and be used for facial recognition, mask detection, and to scan body temperature, without being connected to any network. Connecting it to your network and using the free software allows you to send alerts to multiple employees (Gate Keepers, HR, and Security) in the event someone requests to enter and is detected to have a temperature and/or not have a mask.

Q: Can I use this to deny/approve access to my facility?

A: Yes, You can even choose to use this as a record of attendance if you desire and pre-load employee photographs to deny access to others. A set of dry contacts allows this to be connected to electronic locks. You can then set the unit to release the door lock once any or all of the following criteria are met:

- 1) Facial Recognition,
- 2) Acceptable Body Temperature
- 3) Face Mask in Place.

Q: Can I customize the message when a high temperature or lack of facemask is recognized?

A: Yes. For instance, one facility may choose for the unit to say "High temperature detected, please wait here for further instructions". Another might have the unit say "High temperature detected, please report to room 101 to your left" You can customize the instructions the unit gives.

Q: Is the unit waterproof?

A: No, as with most electronics, the unit and stand should be placed indoors out of the weather. All of the electronics however are installed several feet above the bottom of the stand, so wet floors or even minor flooding will not affect the unit.





LTK – WRISTKIT QUESTIONS & ANSWERS

- Q: Does the WristKit compensate for ambient temperature? Does it need to be installed in a heated & cooled area?
- A: It does, the system should be placed in a controlled environment though (out of direct sunlight and wind). Optimum operating environment for the temperature module is 50 104 degrees F.
- Q: What is the warranty?
- **A:** The tablet, temperature scanner, and pedestal are all covered by a 2 year warranty of materials and workmanship. Full warranty details can be found at www.ltsecuritylnc.com
- Q: How long have you been making these units?
- **A:** Combining facial recognition with mask recognition and temperature scanning is a relatively new concept, but LTS has been in the camera and security business for over 70 years. We provide you with an additional level of security by only selling through authorized distribution that you can rely on.








FOOT OPERATED HAND SANITIZER STAND



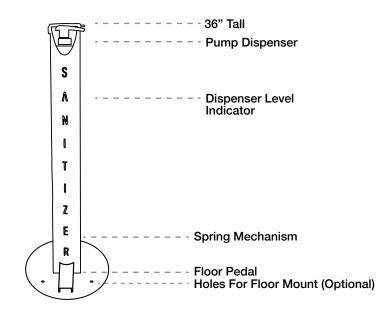

Features

- Hands Free Operation with Floor Pedal
- 1,700 Pumps of Sanitizer (32 ounce bottle)
- Dispenses Accurate Sanitizer per the CDC
- Indoor/Outdoor Use
- 36" Tall
- 15 lbs
- Ships Fully Assembled
- Made in USA

Material

- Powder Coated Steel
- 16 gauge Thick Metal
- Waterproof

Installation

Freestanding or Floor Mount



Codes/Standards

ADA CSA B651 OBC

Limited Lifetime Warranty


See website for details warranty information.

Available Colors



Color swatches intended for reference only.











During this time of national emergency, as we all deal with the effects of COVID-19, it is important to take precautionary measures, such as social distancing, to protect the health of yourself and your employees.

Here is how Womack Electric Supply can help you and your business...

ONLINE SHOPPING & WES CONNECT APP

- Place orders from anywhere you can go online
- Access account inquiry and order history
- Schedule your orders for pick-up or delivery
- Compare selected products side-by-side
- Download product specification sheets
- Convenient and easy to use reorder pad
- Desktop or mobile access via app
- Download via App Store or Google Play

CURBSIDE ORDER PICK-UP SERVICE OR NO SIGNATURE DELIVERY SERVICE

- Contact your local branch or representative
- Place your order via phone, email or online
- Pick-up curbside or await scheduled delivery

ONLINE BILLING & ACCOUNTING SERVICES

- Efficiently manage accounting processes
- Secure, easy-to-use access portal
- View, sort, print, research, & pay online
- One time & ACH payments
- Download data to your accounting software
- Save time & money

